

SKID-MOUNTED PIT PRIVY

Relocatable outhouse over a 30" HDPE pit, with covered deck



Deck and window side

GENERAL NOTES

- All dimensions are to framing unless noted. Rough-sawn boards are full dimension; verify actual sizes delivered by the mill and update the stock table before cutting.
- All lumber within 6" of grade, and all skids, rims, joists, posts and bottom plates: pressure treated. Skids UC4B (ground contact).
- Fasteners in contact with treated lumber: hot-dip galvanized (ASTM A153) or stainless. Siding: 8d ring-shank HDG, battens: 10d ring-shank HDG nailed through the gap only, so boards can move.
- Board-and-batten boards are nailed to horizontal blocking at 24" max. and to plates. Leave a 1/2" gap between boards for shrinkage of air-dried lumber.
- North Carolina: privies fall under the state on-site wastewater rules administered by the county Environmental Health office. Confirm the permit, the setbacks (commonly 100' from a private well, plus streams and property lines) and the seasonal high water table before digging.
- NC Piedmont red clay drains slowly, so the pit works largely as a storage vault. Add a scoop of sawdust, wood ash or dry leaf litter after each use, and keep roof and surface water away from the pit.
- Subterranean termites are active throughout the Piedmont. Keep untreated wood at least 6" above grade (the siding line is set by `building.siding.min_clearance_to_grade`), use UC4B for skids and posts, and inspect the skids every year.
- Wooded site: keep out from under dead or leaning trees, cut roots cleanly when augering the pit, and leave the pad crowned so leaf-litter runoff drains away.
- The pipe is set plumb and level-topped, backfilled with compacted native soil in 6" lifts. The pit has an open bottom; do not bed it in concrete.
- Relocation: remove the back panel, drag the sled from the skid ends (tow holes provided), insert the flange after positioning. See sheet A-502.
- Screening structural checks are on A-602; the cut list and purchase list are on A-601. This is not a stamped engineered design.

SHEET INDEX

SHEET	TITLE
G-001	Cover, sheet index & general notes
A-101	Floor plan
A-102	Roof plan & roof framing plan
S-101	Foundation & floor framing plan
A-201	Exterior elevations: left & front
A-202	Exterior elevations: right & back
A-301	Section A: longitudinal through pit
A-302	Sections B & C: transverse
S-201	Left (low) side wall framing
S-202	Right (high) side wall framing
S-203	End wall framing elevations
A-501	Details: pit & flange, skid, rafter
A-502	Installation & relocation sequence
A-503	Details: removable panel, door, bench
A-601	Cut list & material schedules
A-602	Design checks, parameters & render setup
R-101	Renderings

DESIGN BASIS

ITEM	VALUE
Ground snow pg	15 psf
Roof snow pf	12.0 psf
Roof dead	6 psf
Floor / deck live	40 / 40 psf
Bench occupant	300 lb point
Est. empty weight	1,588 lb
Tow force on dirt	794-1,111 lb
Usable pit volume	55 gal
Est. pit service life	7.0 yr

DESIGN CHECKS

26 pass, 0 fail, 8 info (A-602)

HOW TO REVISE

Edit the JSON (dimensions, stock, materials, lighting, cameras) and run `python -m privy build`. Sheets, cut list, checks and renderings regenerate from it.

SKID-MOUNTED PIT PRIVY

Relocatable outhouse over a 30" HDPE pit, with covered deck

SITE	Wooded lot, NC Piedmont (loblolly pine / small oak), red clay subsoil
OWNER	—
DESIGN	—

KEY DIMENSIONS

Footprint (framing)	4'-0" x 6'-0"
Deck	4'-0" x 6'-0"
Skids	13'-0" long
Roof	3:12 single slope, metal
Pit	30" ID HDPE, 3'-0" deep
Height to roof	9'-9 15/16"

PARAMETRIC SOURCE

design/privy.json
model hash e554680ace
generated 2026-09-28

REV	DATE	DESCRIPTION
A	2026-09-28	Issued for review

SHEET TITLE


COVER, SHEET INDEX & GENERAL NOTES

SCALE: AS NOTED

DATE: 2026-09-28

SHEET 1 OF 17

G-001

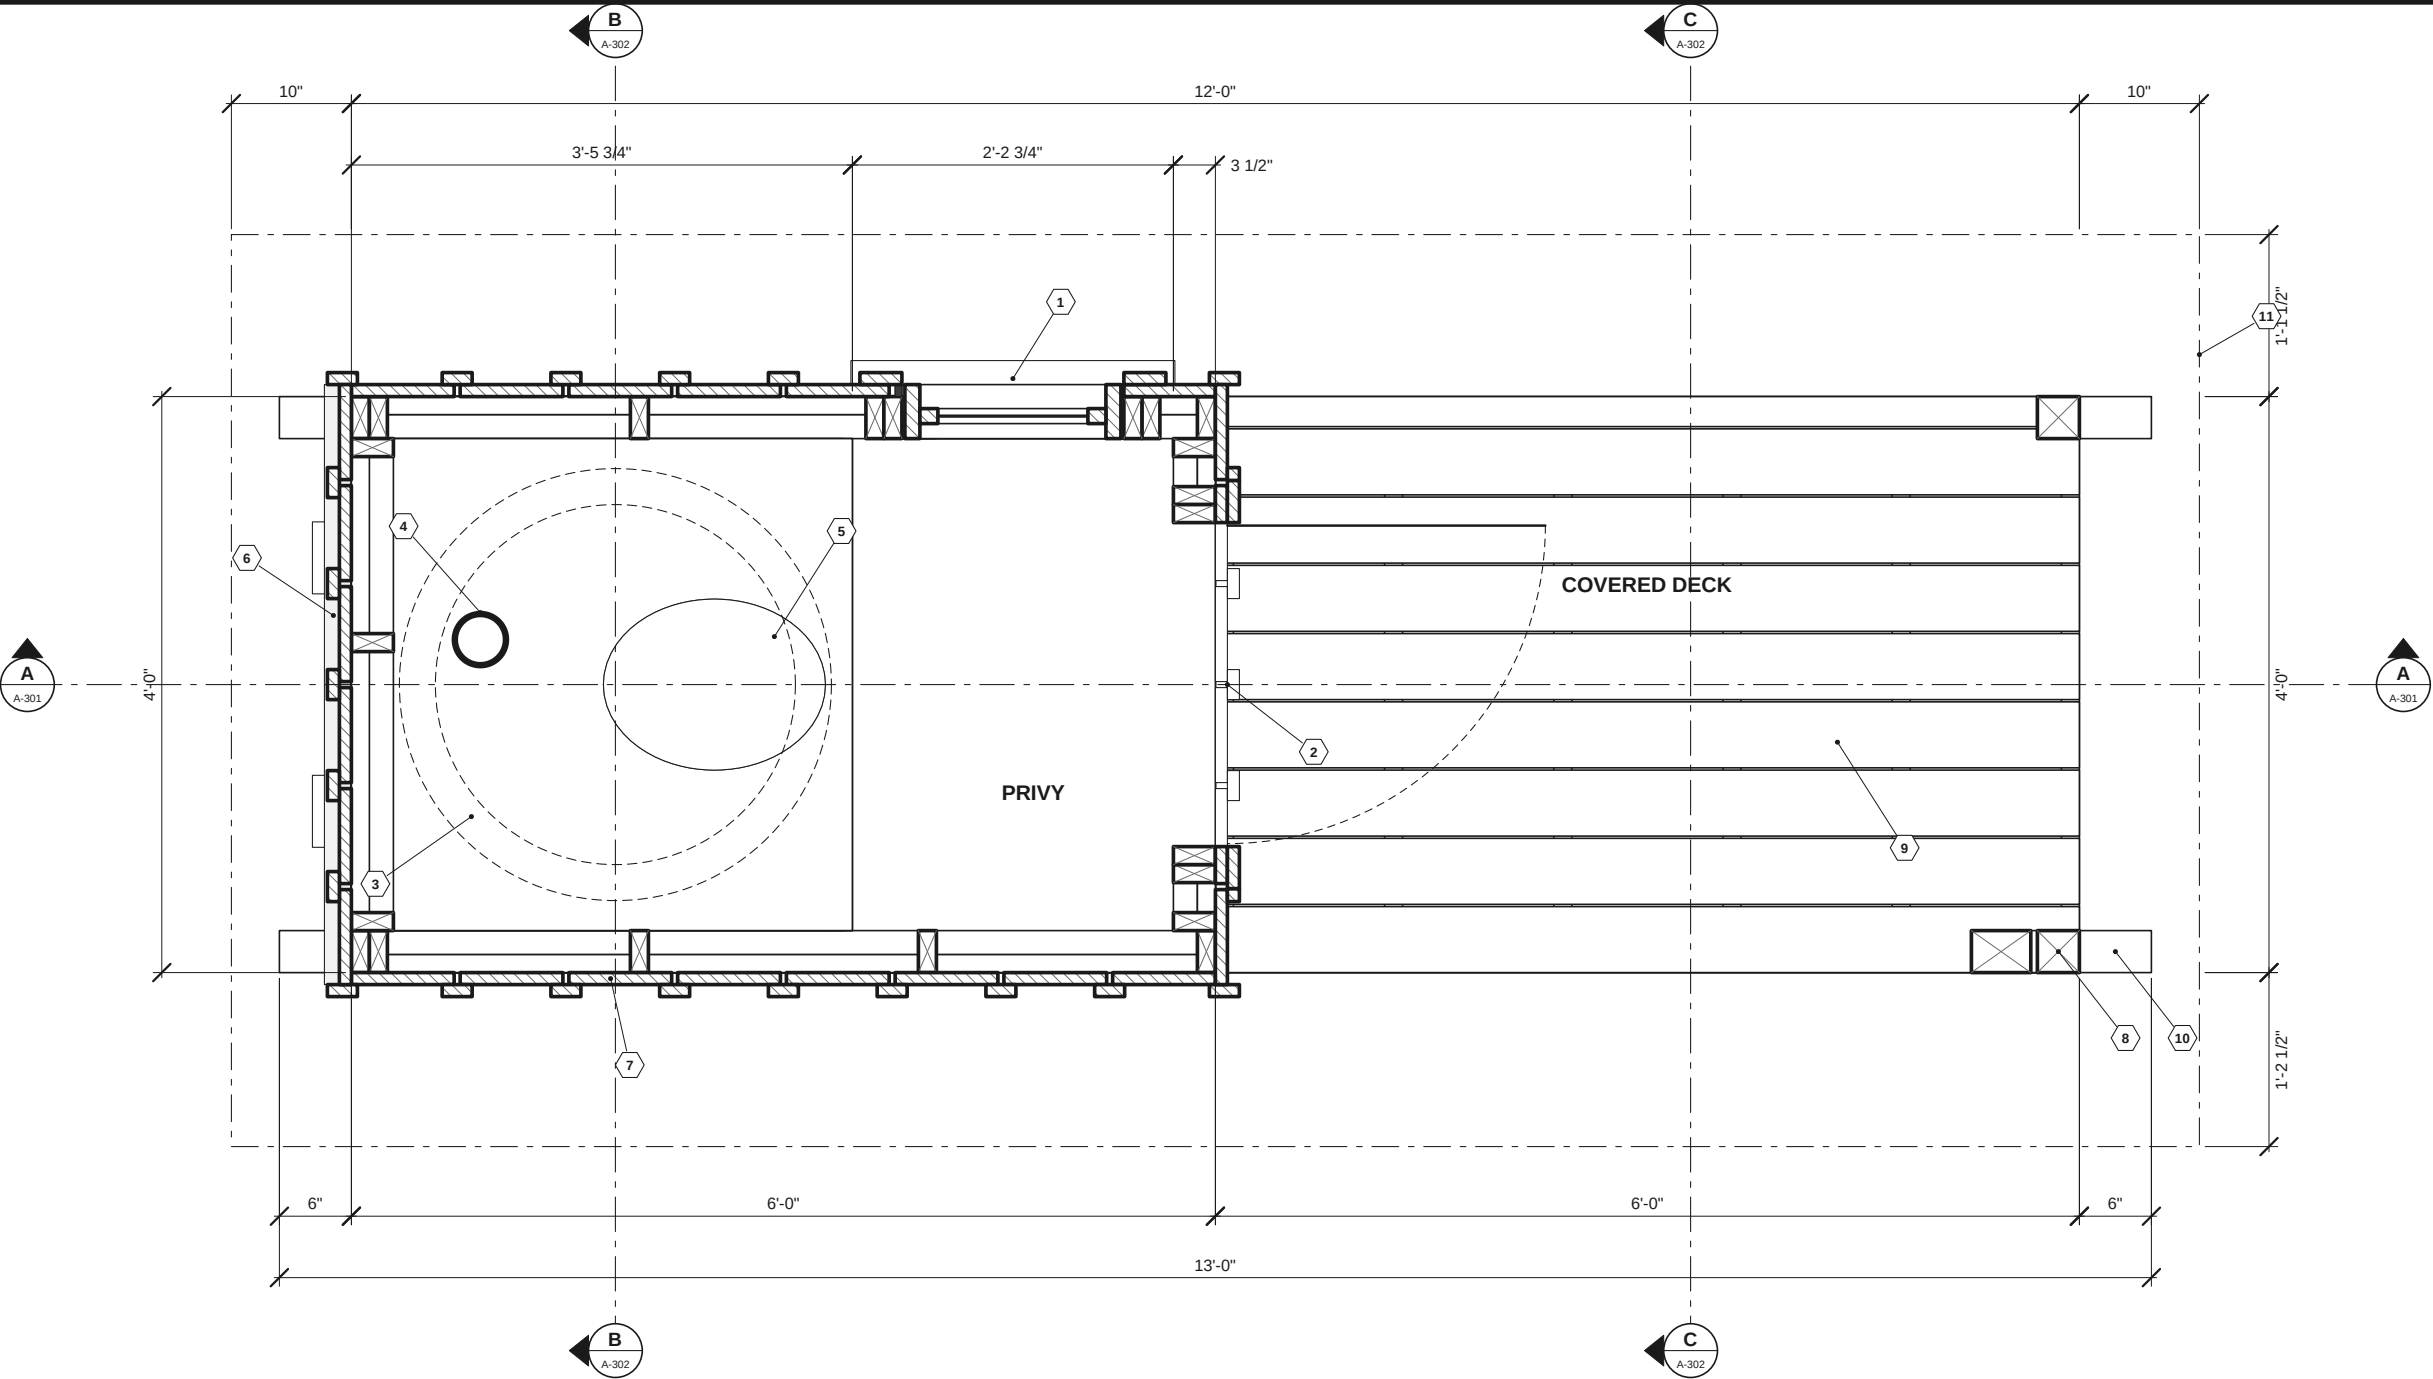

1 FLOOR PLAN
SCALE: 3/4" = 1'-0"

KEYNOTES

- 1 W1 window: 18" x 27" double-hung, sill at 4'-8" above floor (see schedule)
- 2 D1 door: 3-board Z-braced rough-sawn door, swings out onto the deck
- 3 30" HDPE pit below the bench (hidden)
- 4 4" PVC vent from flange up through roof
- 5 Toilet seat on 3/4" plywood bench, top at 1'-5" above floor
- 6 Removable back panel below bench (see A-202, A-501)
- 7 2x4 studs @ 24" o.c.; 1x10 rough-sawn boards + 1x3 battens
- 8 4x4 PT post on skid; knee brace to beam above
- 9 5/4x6 PT decking, 3/16" gaps, notched at posts
- 10 4x6 PT skid, chamfered ends with tow hole
- 11 Line of roof overhang above

DOOR & WINDOW SCHEDULE

TAG	TYPE	R.O.	REMARKS
D1	Door	27" x 76"	3-board Z-braced, rough-sawn, crescent vent; (3) 8" black strap hinges, thumb latch outside, hook & eye inside
W1	Window	18 1/2" x 27 1/2"	Small single-glazed double-hung shed window, wood or vinyl, 18" x 27" unit; sill +4'-8" AFF

SKID-MOUNTED PIT
PRIVY

Relocatable outhouse over a 30" HDPE pit, with covered deck

SITE Wooded lot, NC Piedmont (loblolly pine / small oak), red clay subsoil

OWNER —

DESIGN —

KEY DIMENSIONS

Footprint (framing) 4'-0" x 6'-0"

Deck 4'-0" x 6'-0"

Skids 13'-0" long

Roof 3:12 single slope, metal

Pit 30" ID HDPE, 3'-0" deep

Height to roof 9'-9 15/16"

PARAMETRIC SOURCE

design/privy.json

model hash e554680ace

generated 2026-09-28

REV	DATE	DESCRIPTION
A	2026-09-28	Issued for review

SHEET TITLE


FLOOR PLAN

SCALE: AS NOTED

DATE: 2026-09-28


SHEET 2 OF 17

A-101

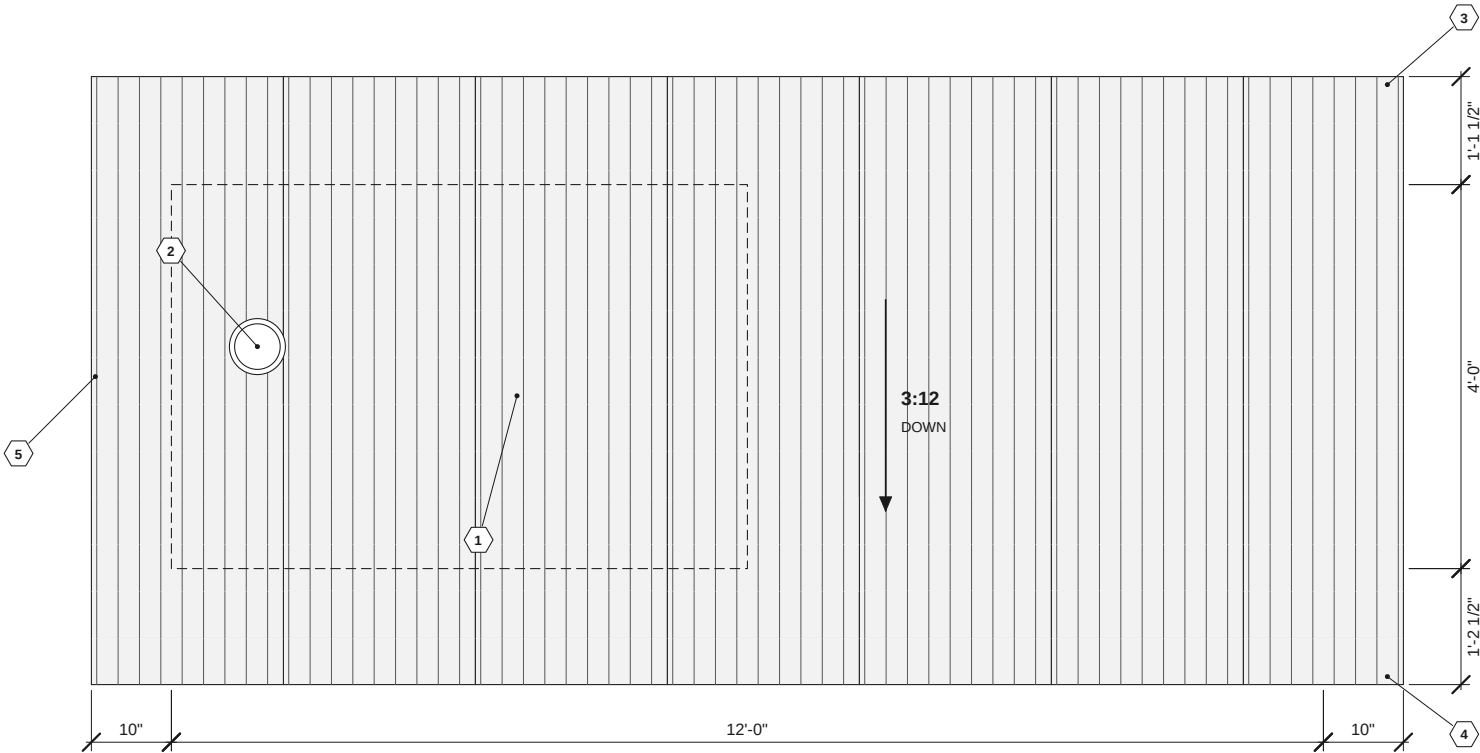

1 ROOF PLAN

SCALE: 1/2" = 1'-0"

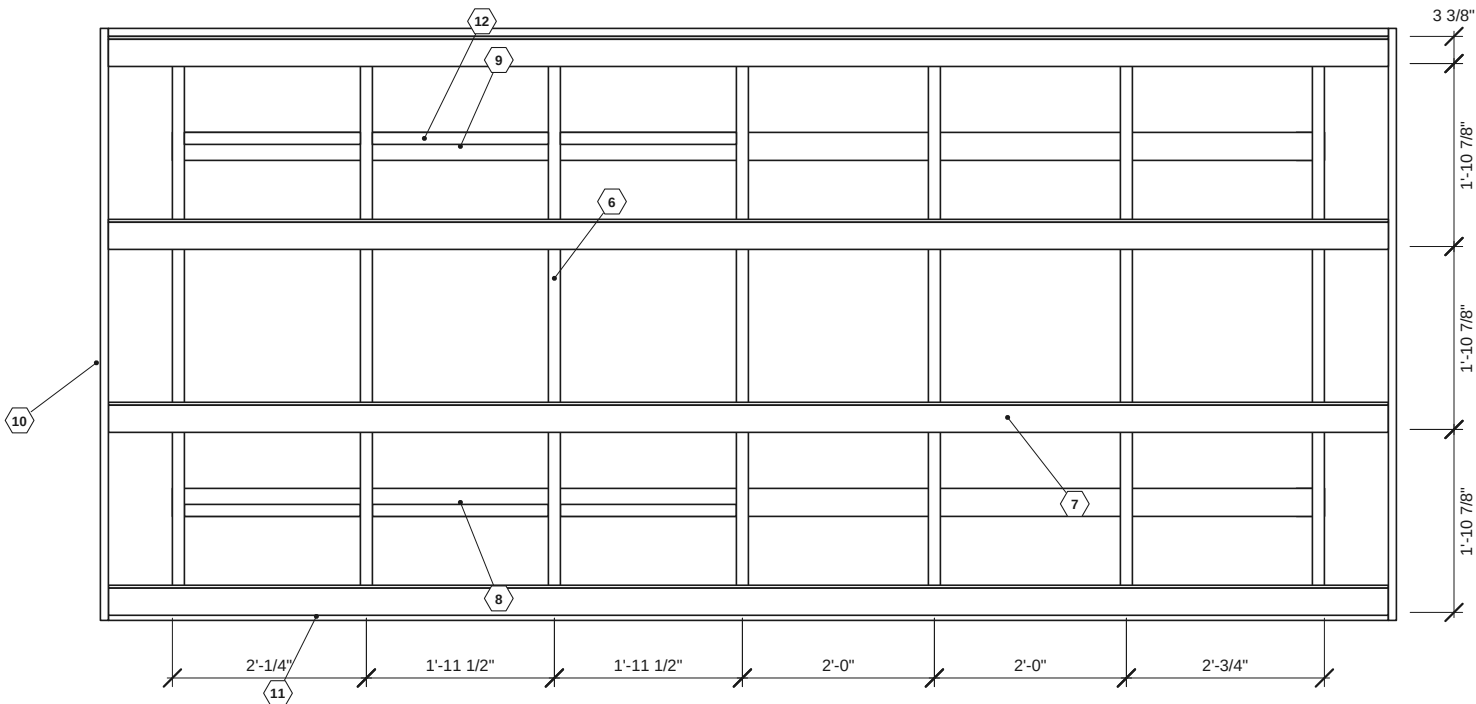

2 ROOF FRAMING PLAN

SCALE: 1/2" = 1'-0"

ROOF NOTES

- Single-slope roof drains to the low (left) side, away from the door and the pit.
- Snow: pg = 15 psf, pf = 12.0 psf (ASCE 7, unheated, Risk Cat. I).
- Every rafter: hurricane tie to beam. The whole roof is part of the towed assembly.
- Keep 10' from dead limbs; a metal roof tolerates small branch and cone falls.

KEYNOTES

- 29 ga galvanized corrugated steel, 2.67" x 1/2" profile, 26" sheet / 24" coverage; lap one corrugation, #9 roofing screws w/ EPDM washers in the valleys at every purlin
- 4" vent through EPDM roof boot, screened cap 18" above roof
- High edge: outside foam closure + peak (shed) flashing
- Low eave: sheets overhang fascia 1 1/2"; inside foam closure
- Rake: sheets overhang 1x6 barge board 1"; optional rake trim
- 2x6 rafters @ 24" o.c. max, birdsmouth on both beams, plumb-cut tails (see A-501)
- 2x4 purlins laid flat @ 24" max along the slope, (2) #10 x 3" screws per rafter
- 4x6 beam, low side, continuous from back wall to deck post
- 4x6 beam, high side, continuous from back wall to deck post
- 1x6 rough-sawn barge board on purlin ends
- 1x6 rough-sawn fascia on rafter tails
- 2x6 frieze blocks between rafters over building walls

SKID-MOUNTED PIT PRIVY

Relocatable outhouse over a 30" HDPE pit, with covered deck

SITE	Wooded lot, NC Piedmont (loblolly pine / small oak), red clay subsoil
OWNER	—
DESIGN	—

KEY DIMENSIONS

Footprint (framing)	4'-0" x 6'-0"
Deck	4'-0" x 6'-0"
Skids	13'-0" long
Roof	3:12 single slope, metal
Pit	30" ID HDPE, 3'-0" deep
Height to roof	9'-9 15/16"

PARAMETRIC SOURCE

design/privy.json
model hash e554680ace
generated 2026-09-28


REV	DATE	DESCRIPTION
A	2026-09-28	Issued for review

SHEET TITLE

ROOF PLAN & ROOF FRAMING PLAN

SCALE: AS NOTED
DATE: 2026-09-28
SHEET 3 OF 17

A-102

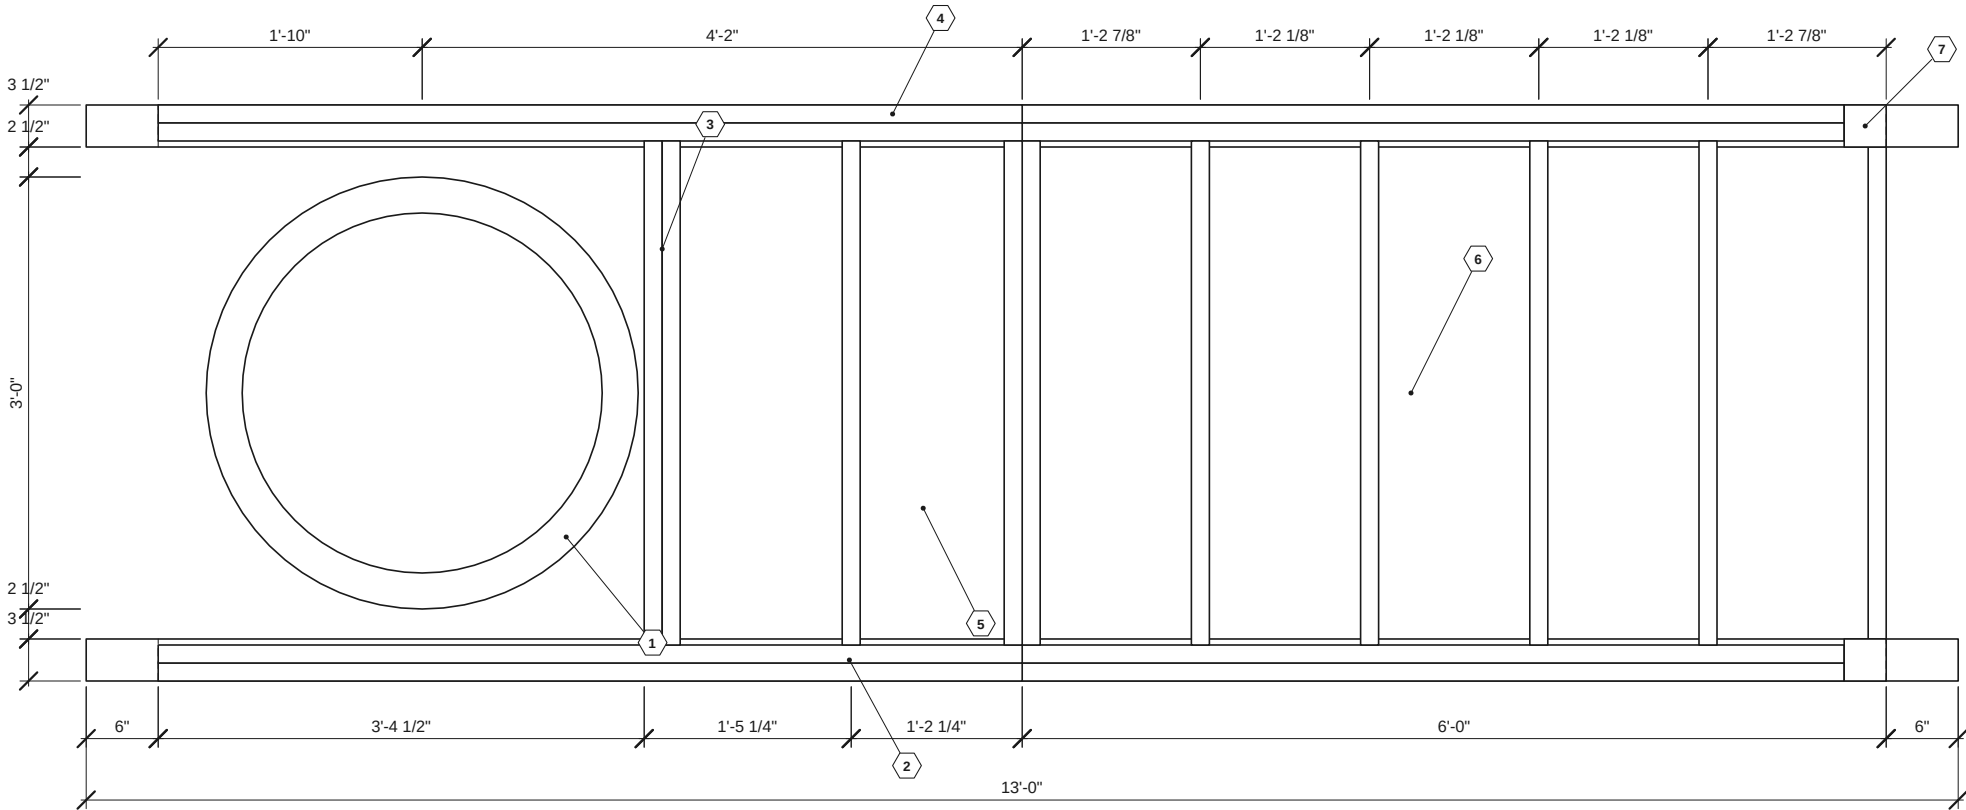

1 FOUNDATION & FLOOR FRAMING PLAN
SCALE: 3/4" = 1'-0"

KEYNOTES

- 1** 30" dual-wall HDPE pipe (36" OD) set before the privy arrives; passes between the skids with 2 1/2" clear each side
- 2** 4x6 PT UC4B skid on edge, full length of privy + deck, chamfered both ends, tow hole each end (A-501)
- 3** (2) 2x6 PT bench-front joist; no floor framing behind it (pipe path)
- 4** (2) 2x6 PT rim joists on the skid, screwed down with 1/4" x 6" structural screws @ 16" o.c.
- 5** 2x6 PT floor joists @ 16" max, joist hangers; 3/4" PT plywood floor
- 6** 2x4 PT deck joists @ 16" o.c. between (2) 2x4 PT rims, hangers
- 7** 4x4 PT post on skid, galv. post base, (2) 1/2" bolts to rim

FOUNDATION NOTES

- No foundation: the privy and deck ride on two continuous skids (a sled) on a level dirt pad.
- Grade the skid paths flat and compact them; shim with PT blocks or flat stones, never with the pipe.
- Red clay (NC Piedmont) holds water: crown the pad slightly so it drains away from the pit and skids.
- Tow only from both skid ends at once (bridle), with the back panel installed and lagged.

SKID-MOUNTED PIT
PRIVY

Relocatable outhouse over a 30" HDPE pit, with covered deck

SITE	Wooded lot, NC Piedmont (loblolly pine / small oak), red clay subsoil
OWNER	—
DESIGN	—

KEY DIMENSIONS

Footprint (framing)	4'-0" x 6'-0"
Deck	4'-0" x 6'-0"
Skids	13'-0" long
Roof	3:12 single slope, metal
Pit	30" ID HDPE, 3'-0" deep
Height to roof	9'-9 15/16"

PARAMETRIC SOURCE

design/privy.json
model hash e554680ace
generated 2026-09-28


REV	DATE	DESCRIPTION
A	2026-09-28	Issued for review

SHEET TITLE

FOUNDATION & FLOOR
FRAMING PLAN

SCALE: AS NOTED
DATE: 2026-09-28
SHEET 4 OF 17

S-101

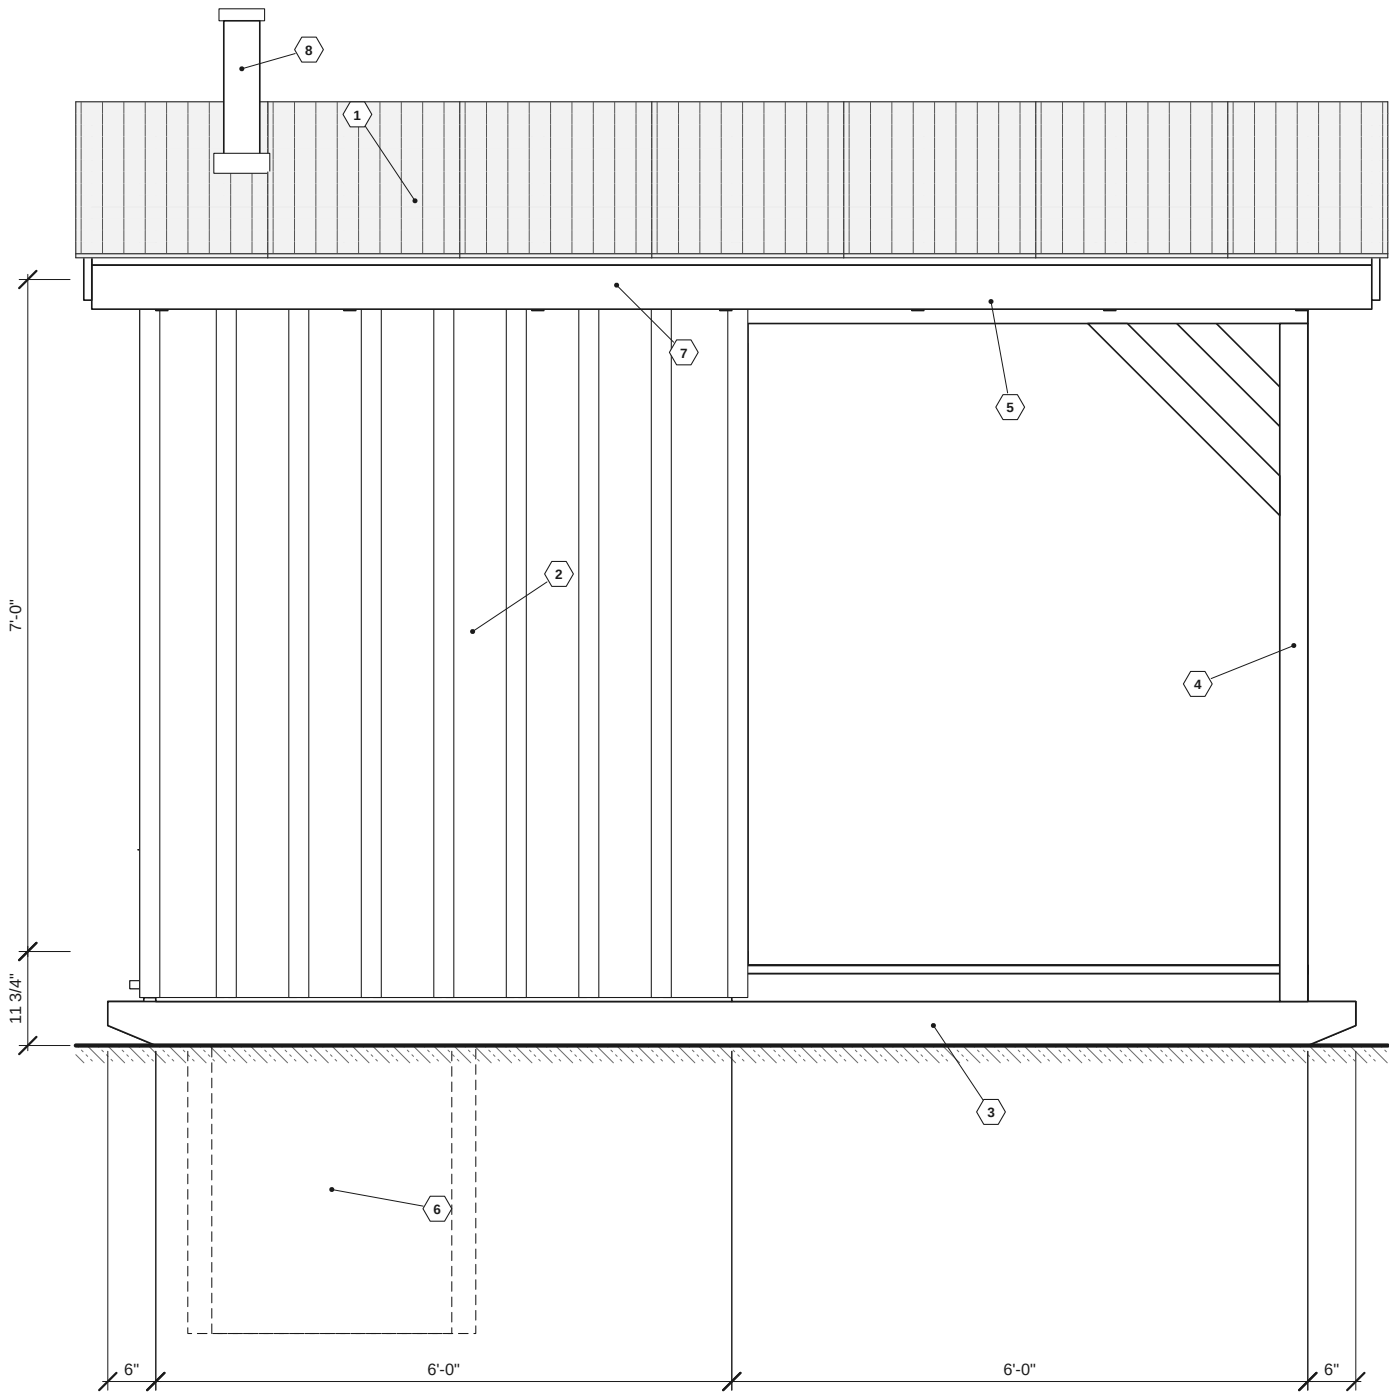


1 LEFT (LOW / EAVE SIDE) ELEVATION

SCALE: 1/2" = 1'-0"

KEYNOTES

- | | | | |
|---|---|----|---|
| 1 | 29 ga galvanized corrugated steel on 2x4 purlins; 3:12 | 6 | 30" HDPE pit, 3'-0" below grade (hidden) |
| 2 | 1x10 rough-sawn boards, 1/2" gaps, 1x3 battens (board-and-batten) | 7 | 1x6 rough-sawn fascia on plumb-cut rafter tails |
| 3 | 4x6 PT skid on edge, chamfered ends | 8 | 4" PVC vent, screened cap |
| 4 | 4x4 PT post with 4x4 knee brace to beam | 9 | D1 door: 3 rough-sawn boards on a 1x6 Z-brace, strap hinges, thumb latch, crescent vent |
| 5 | 4x6 beam, continuous over deck | 10 | 5/4x6 PT deck on 2x4 PT joists |

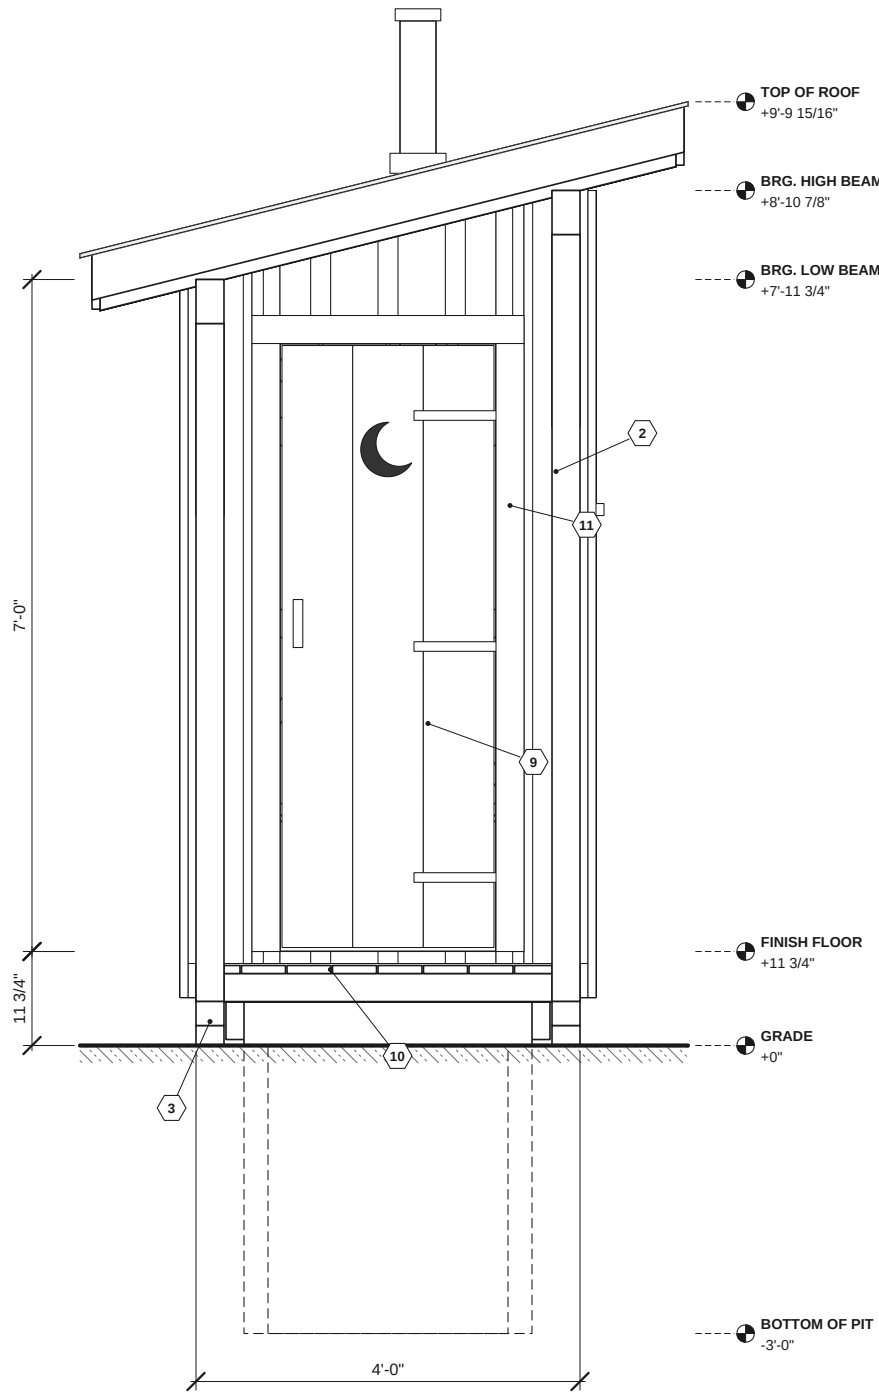

2 FRONT (DOOR / DECK) ELEVATION

SCALE: 1/2" = 1'-0"

- | | |
|----|----------------------------|
| 11 | 1x4 rough-sawn door casing |
|----|----------------------------|

SKID-MOUNTED PIT
PRIVY

Relocatable outhouse over a 30" HDPE pit, with covered deck

SITE	Wooded lot, NC Piedmont (loblolly pine / small oak), red clay subsoil
OWNER	—
DESIGN	—

KEY DIMENSIONS

Footprint (framing)	4'-0" x 6'-0"
Deck	4'-0" x 6'-0"
Skids	13'-0" long
Roof	3:12 single slope, metal
Pit	30" ID HDPE, 3'-0" deep
Height to roof	9'-9 15/16"

PARAMETRIC SOURCE

design/privy.json
model hash e554680ace
generated 2026-09-28

REV	DATE	DESCRIPTION
A	2026-09-28	Issued for review

SHEET TITLE


EXTERIOR ELEVATIONS: LEFT
& FRONT

SCALE: AS NOTED

DATE: 2026-09-28

SHEET 5 OF 17

A-201

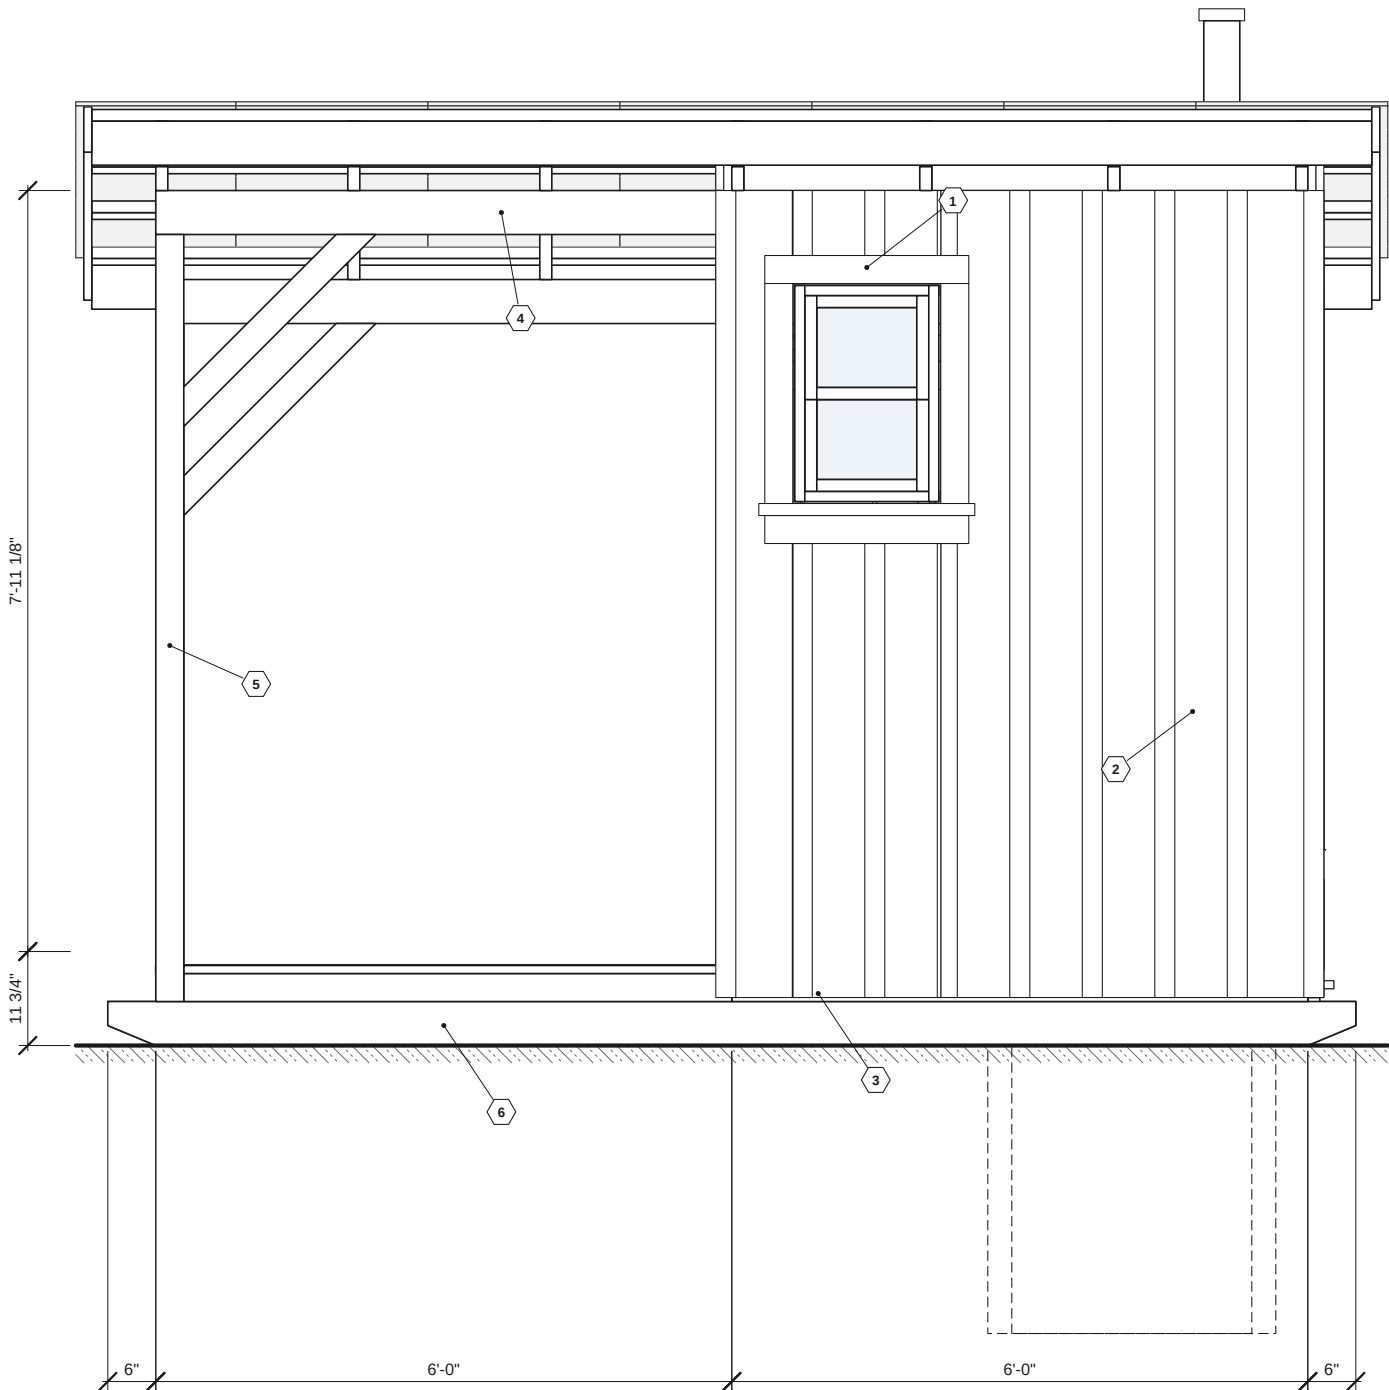


1 RIGHT (HIGH / WINDOW SIDE) ELEVATION

SCALE: 1/2" = 1'-0"

KEYNOTES

- 1 W1 double-hung window, 1x4 rough-sawn casing, sill and apron
2 1x10 rough-sawn boards, 1/2" gaps, 1x3 battens (board-and-batten)
3 Siding stops 6" above grade (IRC R317.1 decay / termite clearance); PT rim exposed below
4 4x6 beam, continuous over deck
5 4x4 PT post with 4x4 knee brace to beam

- 6 4x6 PT skid on edge, chamfered ends
7 Removable panel: boards on 1x4 rails, (10) 1/4" lags; remove to slide the privy over the pit, then re-install
8 Galvanized Z-flashing at panel head
9 Pull handles

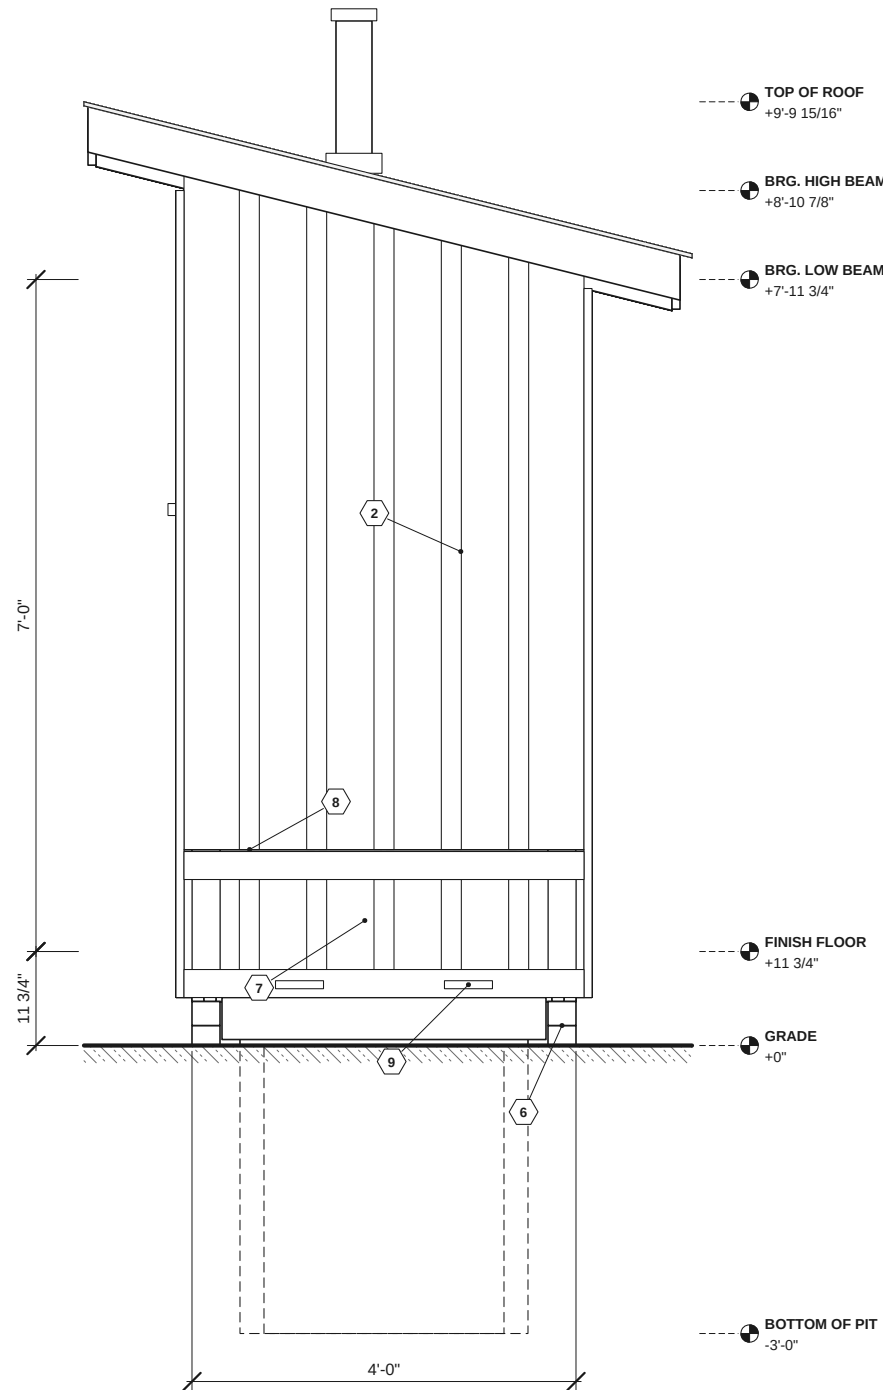

2 BACK (REMOVABLE PANEL) ELEVATION

SCALE: 1/2" = 1'-0"

SKID-MOUNTED PIT PRIVY

Relocatable outhouse over a 30" HDPE pit, with covered deck

SITE	Wooded lot, NC Piedmont (loblolly pine / small oak), red clay subsoil
OWNER	—
DESIGN	—

KEY DIMENSIONS

Footprint (framing)	4'-0" x 6'-0"
Deck	4'-0" x 6'-0"
Skids	13'-0" long
Roof	3:12 single slope, metal
Pit	30" ID HDPE, 3'-0" deep
Height to roof	9'-9 15/16"

PARAMETRIC SOURCE

design/privy.json
model hash e554680ace
generated 2026-09-28

REV	DATE	DESCRIPTION
A	2026-09-28	Issued for review

SHEET TITLE


EXTERIOR ELEVATIONS:
RIGHT & BACK

SCALE: AS NOTED

DATE: 2026-09-28

SHEET 6 OF 17

A-202

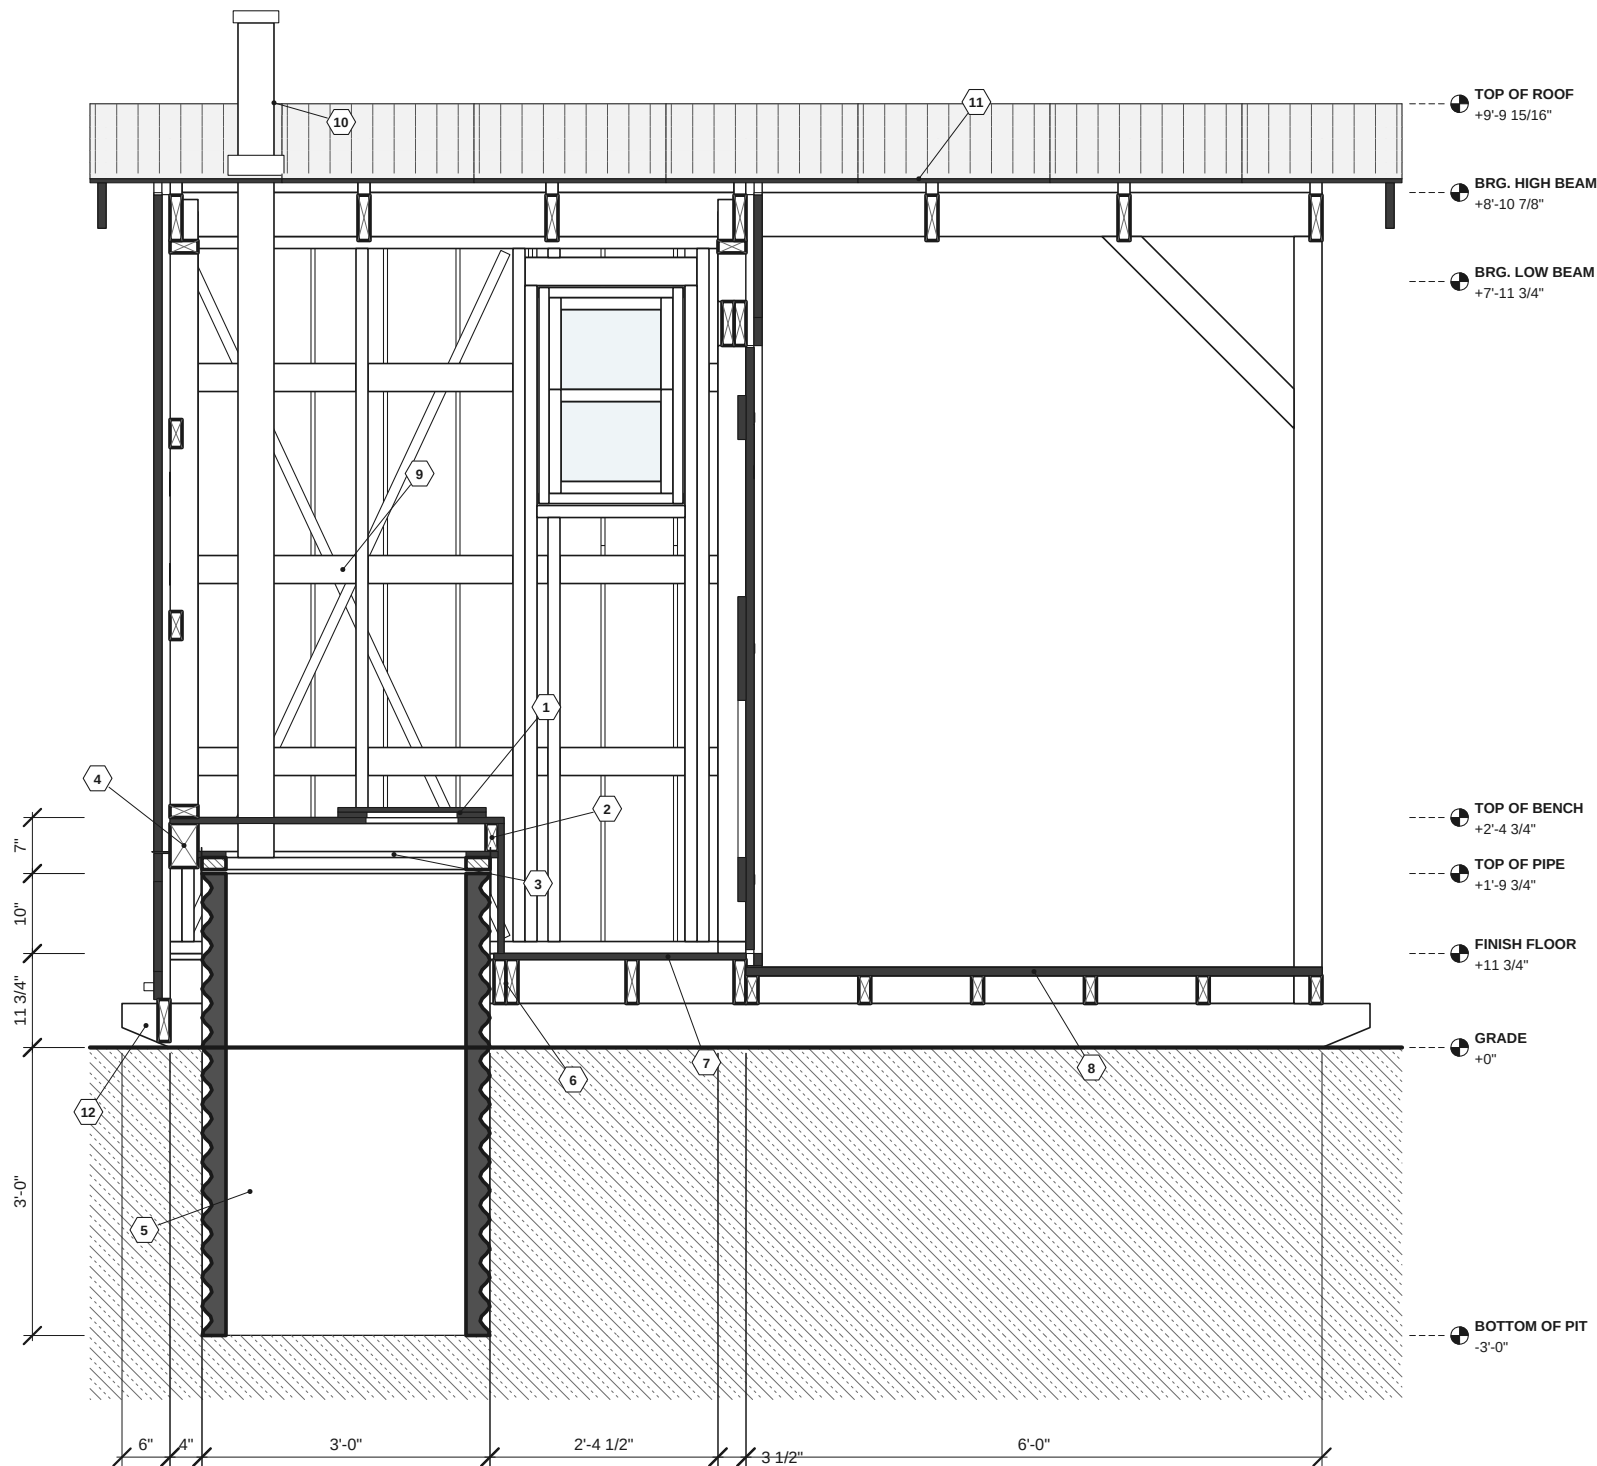

KEYNOTES

- 1 Toilet seat with lid on 3/4" BC plywood bench top, sealed
- 2 2x4 bench framing: front rail, joists, side ledgers; 3/4" plywood front panel
- 3 Flange: 3/4" PT plywood plate with 30" opening + 2-ply collar; EPDM skirt with SS band clamps (A-501)
- 4 4x6 PT bench header over the panel opening
- 5 30" dual-wall HDPE pipe, open bottom, compacted native backfill
- 6 (2) 2x6 PT bench-front joist; open behind for the pipe
- 7 2x6 PT joists @ 16", 3/4" PT plywood floor
- 8 5/4x6 PT decking on 2x4 PT joists @ 16" o.c.
- 9 2x4 studs @ 24" o.c., flat blocking @ 24", let-in strap bracing
- 10 4" PVC vent, screened cap
- 11 2x6 rafters @ 24", 2x4 purlins, corrugated steel
- 12 4x6 PT skid beyond

SKID-MOUNTED PIT
PRIVY

Relocatable outhouse over a 30" HDPE pit, with covered deck

SITE	Wooded lot, NC Piedmont (loblolly pine / small oak), red clay subsoil
OWNER	—
DESIGN	—

KEY DIMENSIONS

Footprint (framing)	4'-0" x 6'-0"
Deck	4'-0" x 6'-0"
Skids	13'-0" long
Roof	3:12 single slope, metal
Pit	30" ID HDPE, 3'-0" deep
Height to roof	9'-9 15/16"

PARAMETRIC SOURCE

design/privy.json
model hash e554680ace
generated 2026-09-28

REV	DATE	DESCRIPTION
A	2026-09-28	Issued for review

SHEET TITLE

SECTION A: LONGITUDINAL
THROUGH PIT


SCALE: AS NOTED
DATE: 2026-09-28
SHEET 7 OF 17

A-301



1. The pipe top (+9 3/4") sits 3/4" below the bench header so the privy can slide over it; the flange closes the gap afterwards.
2. The rafters bear on 4x6 beams at +7-11 3/4" (low) and +8-10 7/8" (high); the front and back walls are non-bearing.
3. Everything above the flange plate is removable with the building; the pipe stays in the ground.

A-302

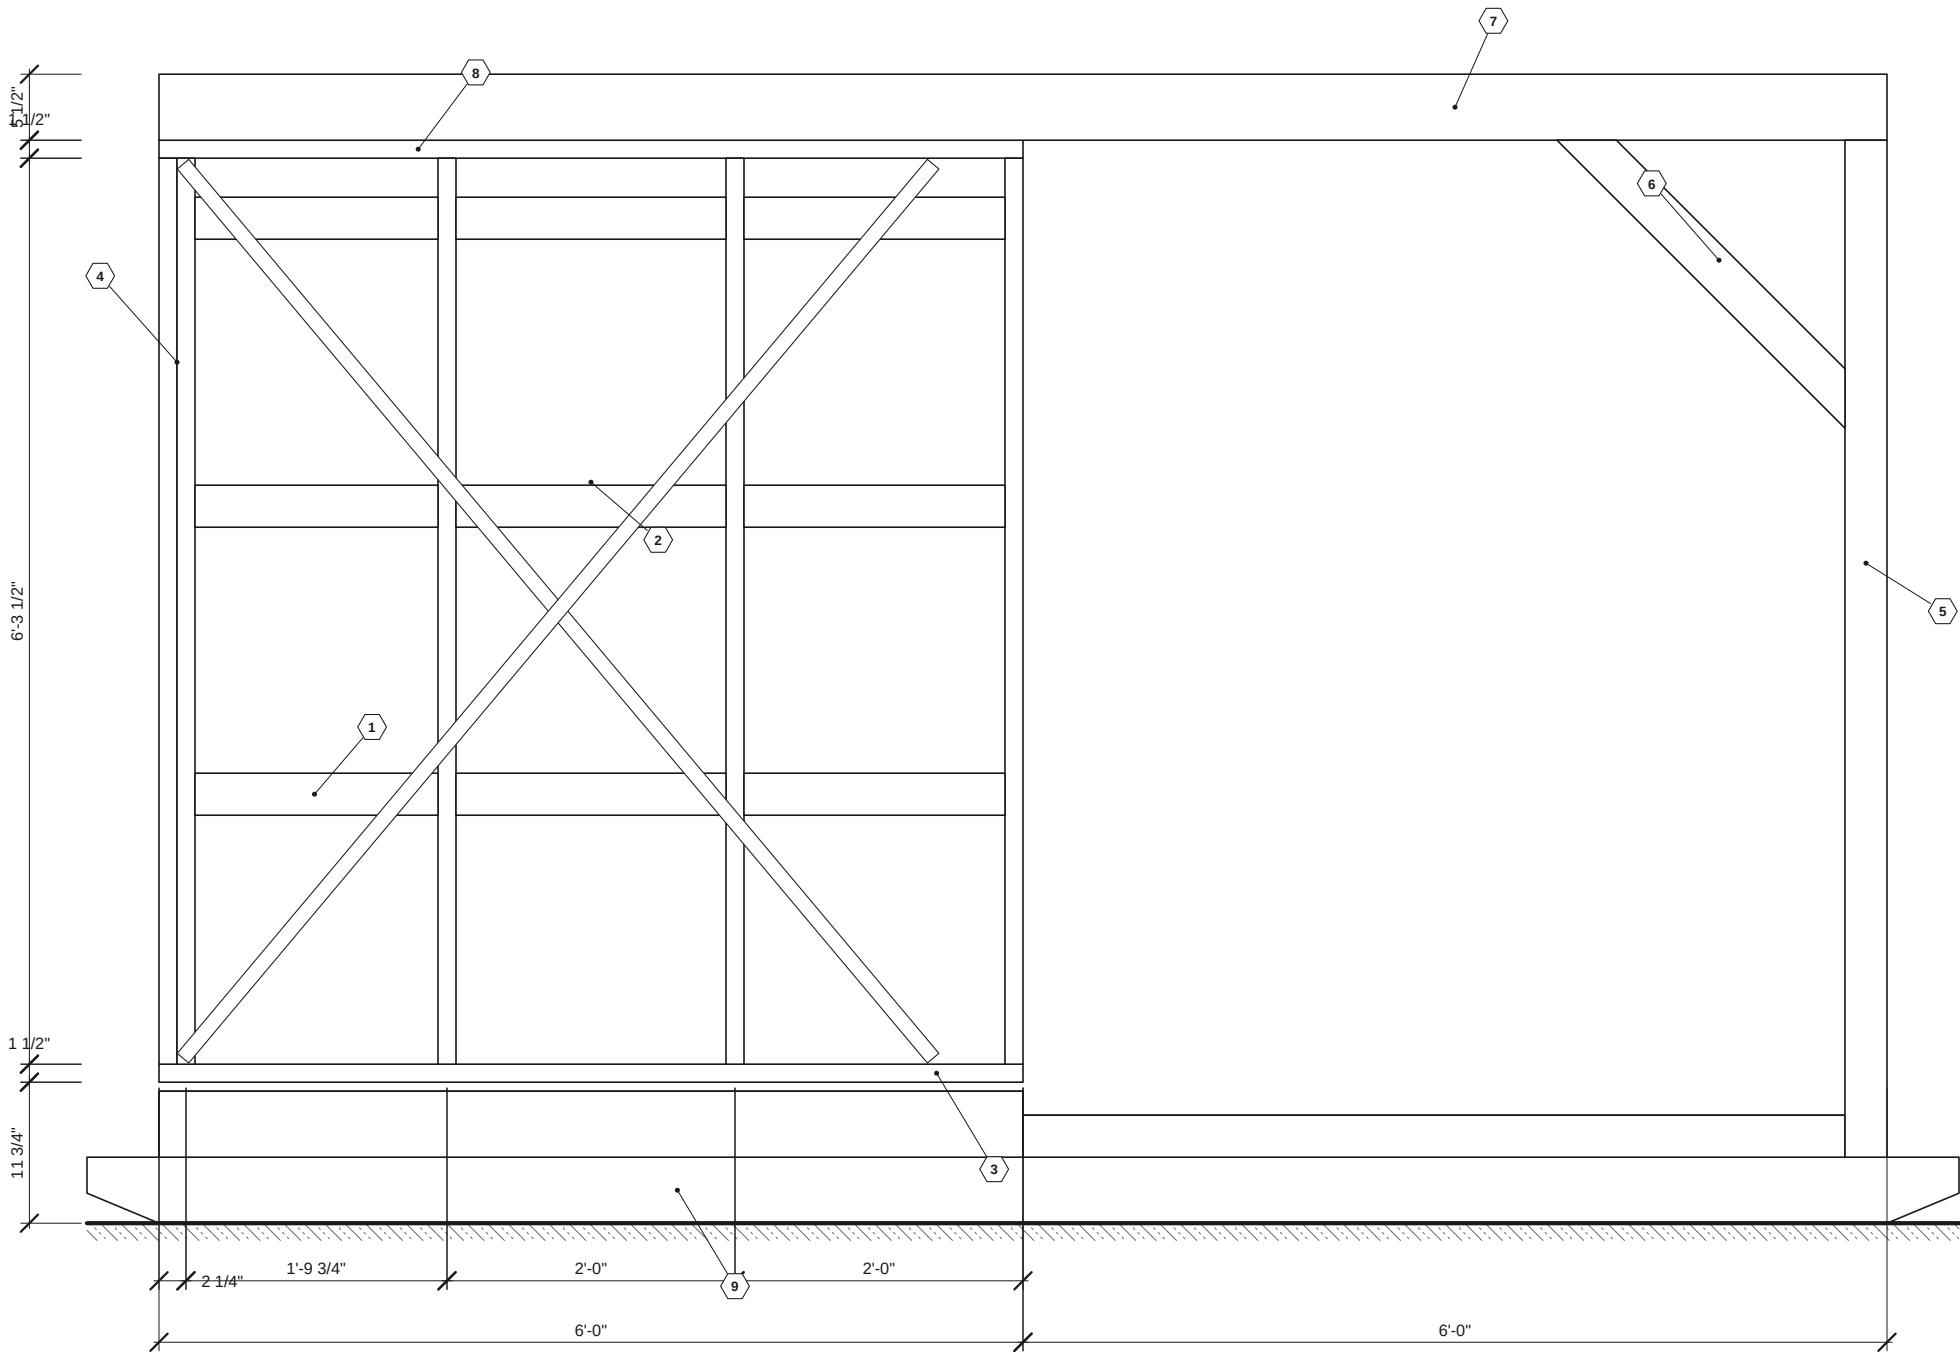

1 LEFT SIDE FRAME (FROM OUTSIDE)

SCALE: 3/4" = 1'-0"

KEYNOTES

- | | | | |
|---|--|---|---------------------------------------|
| 1 | 2x4 flat blocking @ 24" o.c., flush to outside face (siding nailers) | 9 | 4x6 PT skid and (2) 2x6 PT rim joists |
| 2 | Let-in steel wall-bracing strap, X in the solid bay; nail at each stud and plate | | |
| 3 | PT 2x4 bottom plate on 3/4" PT plywood | | |
| 4 | Doubled corner studs at the back: bench-header hangers | | |
| 5 | 4x4 PT post on skid | | |
| 6 | 4x4 PT knee brace, 45 deg, 24" legs | | |
| 7 | 4x6 beam on top plate, continuous to the post | | |
| 8 | Single 2x4 top plate (beam above acts as second plate) | | |

FRAMING NOTES

- 2x4 SPF #2 studs @ 24" o.c.; the side walls carry the roof via one top plate plus the 4x6 beam.
- Toe-screw and strap the beam to each corner stud pack and to the post.
- Studs differ in length between the low and high walls; cut from 92-5/8" precuts where possible.

SKID-MOUNTED PIT PRIVY

Relocatable outhouse over a 30" HDPE pit, with covered deck

SITE	Wooded lot, NC Piedmont (loblolly pine / small oak), red clay subsoil
OWNER	—
DESIGN	—

KEY DIMENSIONS

Footprint (framing)	4'-0" x 6'-0"
Deck	4'-0" x 6'-0"
Skids	13'-0" long
Roof	3:12 single slope, metal
Pit	30" ID HDPE, 3'-0" deep
Height to roof	9'-9 15/16"

PARAMETRIC SOURCE

design/privy.json
model hash e554680ace
generated 2026-09-28

REV	DATE	DESCRIPTION
A	2026-09-28	Issued for review

SHEET TITLE


LEFT (LOW) SIDE WALL FRAMING

SCALE: AS NOTED

DATE: 2026-09-28

SHEET 9 OF 17

S-201

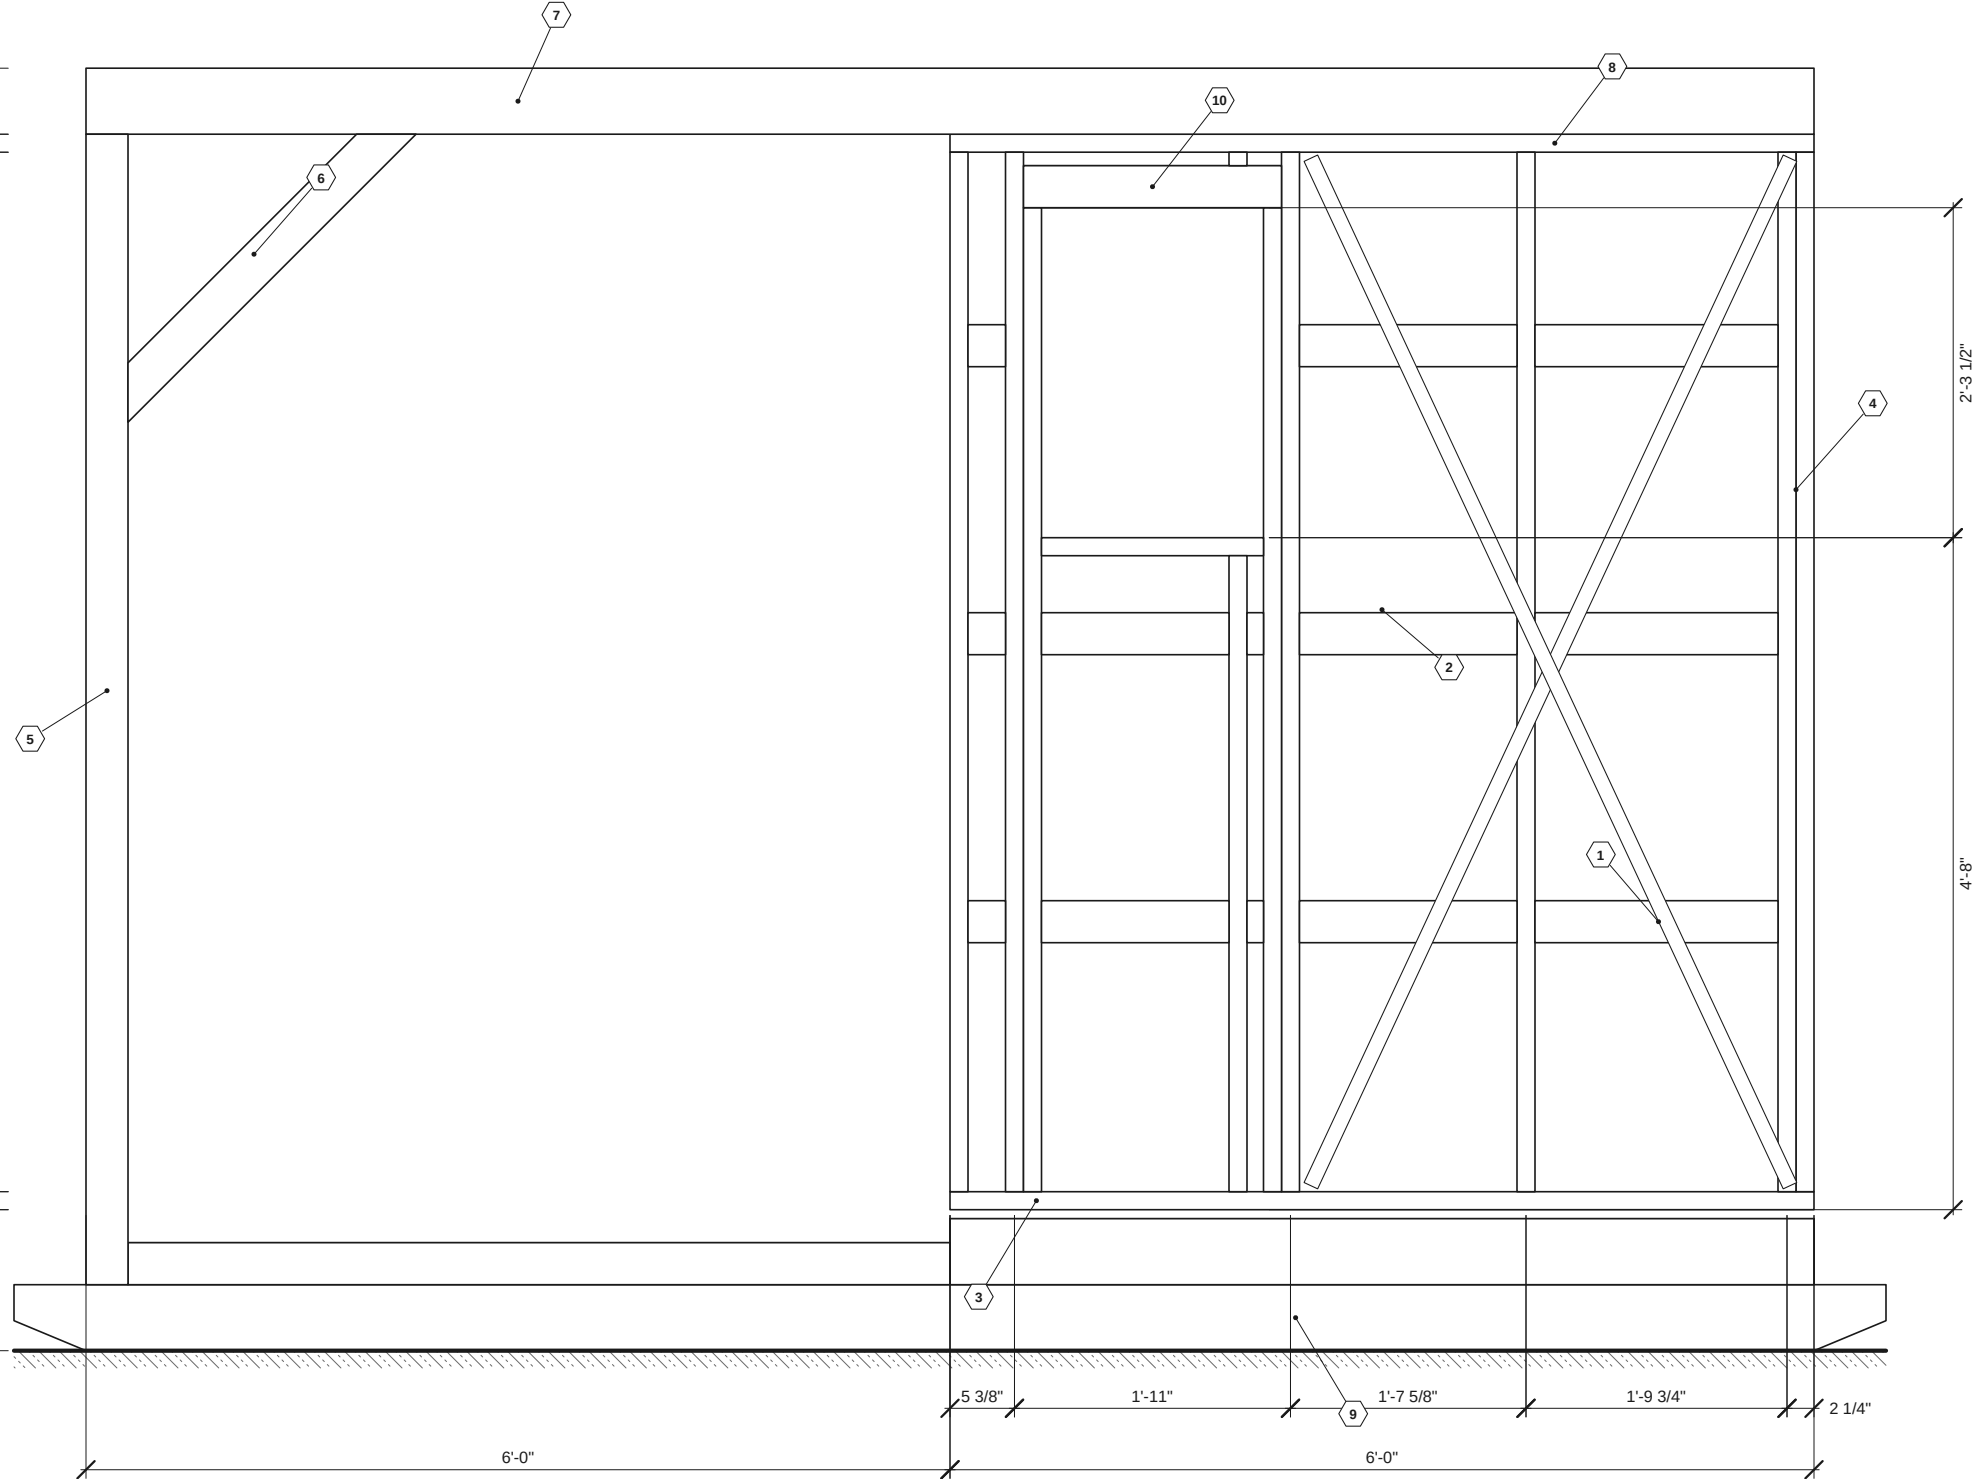

KEYNOTES

- SCALE: 3/4" = 1'-0"
- 2x4 flat blocking @ 24" o.c., flush to outside face (siding nailers)
 - Let-in steel wall-bracing strap, X in the solid bay; nail at each stud and plate
 - PT 2x4 bottom plate on 3/4" PT plywood
 - Doubled corner studs at the back: bench-header hangers
 - 4x4 PT post on skid
 - 4x4 PT knee brace, 45 deg, 24" legs
 - 4x6 beam on top plate, continuous to the post
 - Single 2x4 top plate (beam above acts as second plate)

- 4x6 PT skid and (2) 2x6 PT rim joists
- (2) 2x4 header over W1, R.O. 18 1/2" x 27 1/2"; king + jack studs; flat 2x4 rough sill

FRAMING NOTES

- 2x4 SPF #2 studs @ 24" o.c.; the side walls carry the roof via one top plate plus the 4x6 beam.
- Toe-screw and strap the beam to each corner stud pack and to the post.
- Studs differ in length between the low and high walls; cut from 92-5/8" precuts where possible.

SKID-MOUNTED PIT PRIVY

Relocatable outhouse over a 30" HDPE pit, with covered deck

SITE	Wooded lot, NC Piedmont (loblolly pine / small oak), red clay subsoil
OWNER	—
DESIGN	—

KEY DIMENSIONS

Footprint (framing)	4'-0" x 6'-0"
Deck	4'-0" x 6'-0"
Skids	13'-0" long
Roof	3:12 single slope, metal
Pit	30" ID HDPE, 3'-0" deep
Height to roof	9'-9 15/16"

PARAMETRIC SOURCE

design/privy.json
model hash e554680ace
generated 2026-09-28

REV	DATE	DESCRIPTION
A	2026-09-28	Issued for review

SHEET TITLE

RIGHT (HIGH) SIDE WALL FRAMING

SCALE: AS NOTED
DATE: 2026-09-28
SHEET 10 OF 17

S-202

KEYNOTES

- 1

(2) 2x6 header over D1, R.O. 27" x 76"; king + jack studs
- 2

Bottom plate cut out at door after framing
- 3

Sloped 2x4 top plate under end rafter, 3:12
- 4

2x4 flat blocking @ 24" (siding nailers)
- 5

4x6 PT bench header, full interior width, face-mount hangers to doubled corner studs; removable panel opening below
- 6

2x4 PT bottom plate on bench top over header


END WALL NOTES

1.

End walls are non-bearing: the rafters span side to side between the 4x6 beams.
2.

The back wall has no bottom plate below the bench header. With the panel off, the bench box and the header brace the back; keep the panel lagged whenever the privy is moved.
3.

The front wall is too narrow for strap bracing beside the door; the roof diaphragm and the floor carry racking.

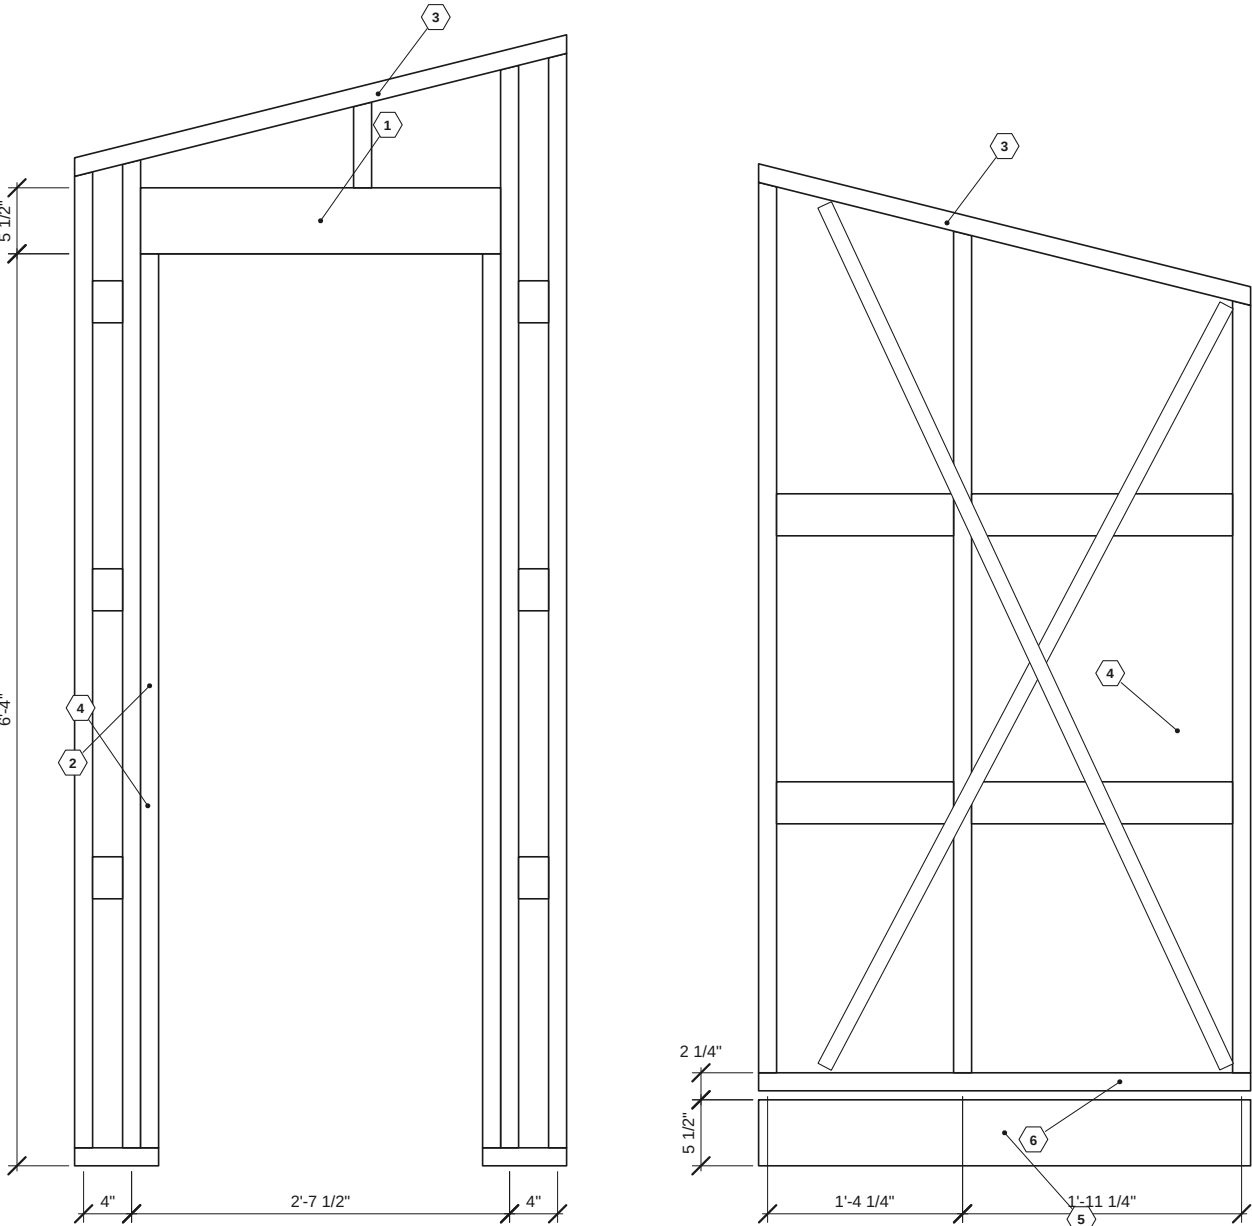

1 FRONT WALL FRAMING (FROM OUTSIDE)
SCALE: 3/4" = 1'-0"

2 BACK WALL FRAMING (FROM OUTSIDE)
SCALE: 3/4" = 1'-0"

SKID-MOUNTED PIT
PRIVY

Relocatable outhouse over a 30" HDPE pit, with covered deck

SITE	Wooded lot, NC Piedmont (loblolly pine / small oak), red clay subsoil
OWNER	—
DESIGN	—

KEY DIMENSIONS

Footprint (framing)	4'-0" x 6'-0"
Deck	4'-0" x 6'-0"
Skids	13'-0" long
Roof	3:12 single slope, metal
Pit	30" ID HDPE, 3'-0" deep
Height to roof	9'-9 15/16"

PARAMETRIC SOURCE

design/privy.json
model hash e554680ace
generated 2026-09-28


REV	DATE	DESCRIPTION
A	2026-09-28	Issued for review

SHEET TITLE

END WALL FRAMING
ELEVATIONS


SCALE: AS NOTED
DATE: 2026-09-28
SHEET 11 OF 17

S-203

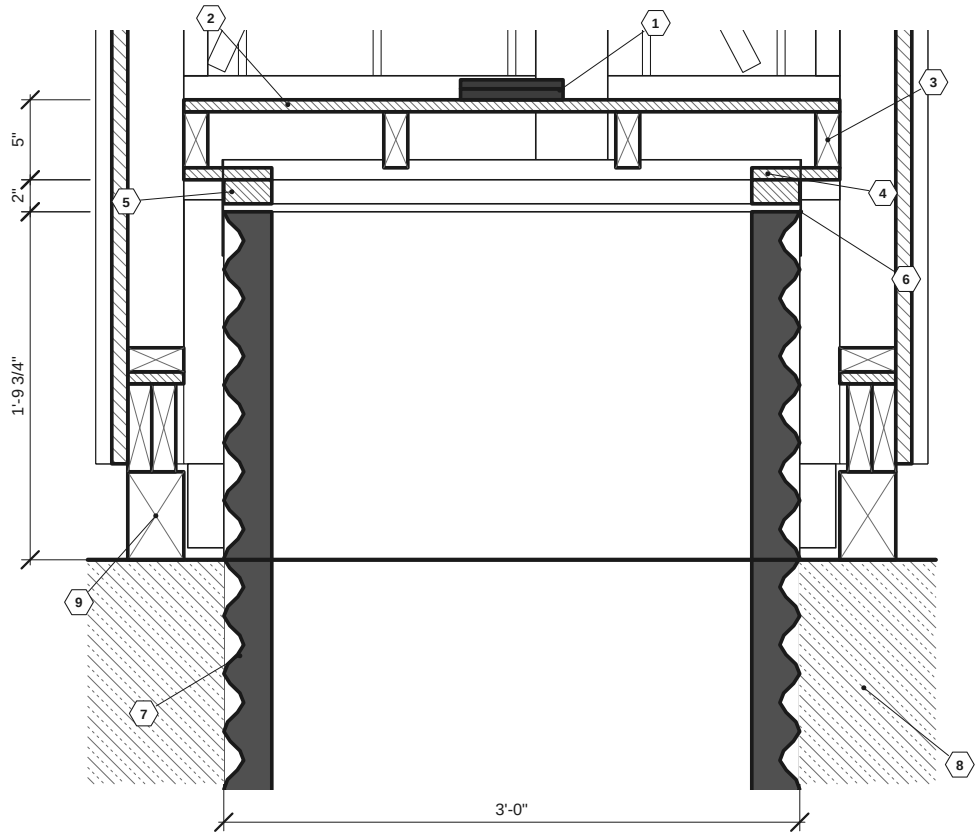


1 PIT & FLANGE DETAIL (SECTION B)

SCALE: 1" = 1'-0"

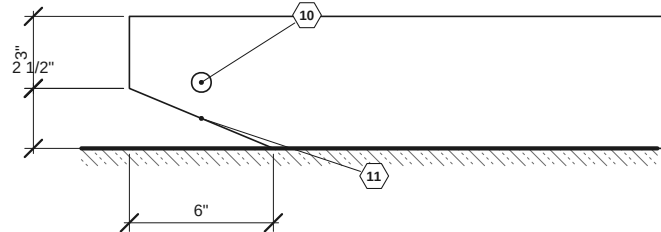

2 SKID END (BOTH ENDS)

SCALE: 1'-1/2" = 1'-0"

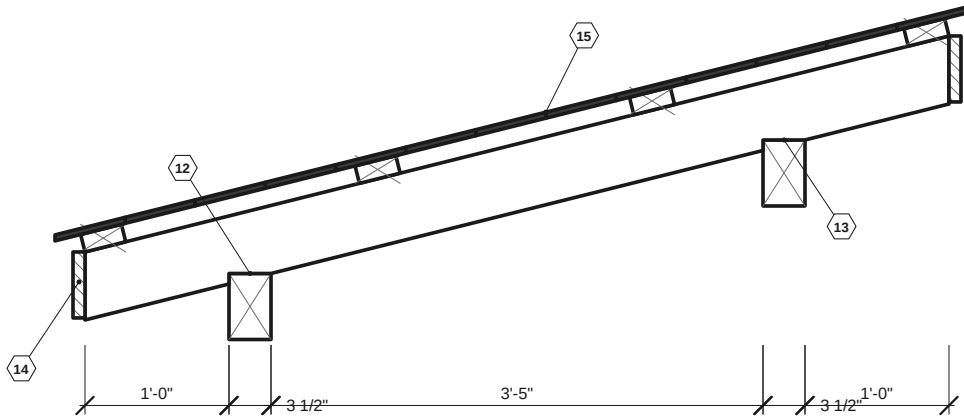

3 RAFTER LAYOUT (TYPICAL) - 6'-2 3/16" 2X6

SCALE: 3/4" = 1'-0"

KEYNOTES

- 1 Toilet seat, stainless hinge bolts through bench top
- 2 3/4" BC plywood bench top, sealed; hole cut to the seat template
- 3 2x4 bench side ledger screwed to studs
- 4 Flange plate: 3/4" PT plywood with 30" hole; slid in from the back after the privy is placed; (12) #10 x 3" SS screws up into bench framing
- 5 Collar: 2 plies 3/4" PT plywood rings (half rings glued & screwed), OD = pipe OD
- 6 EPDM skirt over the gap, (2) stainless band clamps; foam gasket under collar
- 7 30" dual-wall HDPE pipe, cut square, plumb
- 8 Backfill: native soil in 6" lifts, hand tamped; no concrete
- 9 4x6 PT skid, clear of pipe
- 10 13/16" tow hole 3" from end, for a 3/4" shackle
- 11 Chamfer 6" x 2 1/2" on the bottom edge, both ends, so the sled rides up over roots and ruts
- 12 Birdsmouth: 3 1/2" seat, 7/8" heel; hurricane tie each rafter
- 13 Birdsmouth at high beam, heel cut on the inside face
- 14 Plumb-cut tail, 1x6 rough-sawn fascia
- 15 2x4 purlins flat @ 24" max; 3:12 corrugated steel

SKID-MOUNTED PIT PRIVY

Relocatable outhouse over a 30" HDPE pit, with covered deck

SITE	Wooded lot, NC Piedmont (loblolly pine / small oak), red clay subsoil
OWNER	—
DESIGN	—

KEY DIMENSIONS

Footprint (framing)	4'-0" x 6'-0"
Deck	4'-0" x 6'-0"
Skids	13'-0" long
Roof	3:12 single slope, metal
Pit	30" ID HDPE, 3'-0" deep
Height to roof	9'-9 15/16"

PARAMETRIC SOURCE

design/privy.json
model hash e554680ace
generated 2026-09-28

REV	DATE	DESCRIPTION
A	2026-09-28	Issued for review

SHEET TITLE

**DETAILS: PIT & FLANGE,
SKID, RAFTER**

SCALE: AS NOTED

DATE: 2026-09-28

SHEET 12 OF 17


A-501

1 LAY OUT & EXCAVATE




Clear and level the pad, crowned slightly so water runs away. Dig or auger a 44" hole 3'-0" deep; keep the bottom undisturbed.

2 SET THE PIPE

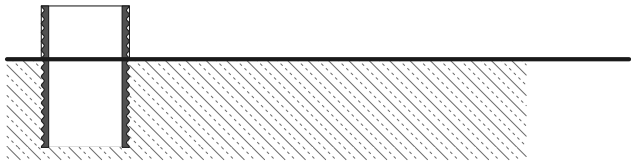


Cut the pipe to 4'-9 3/4". Set it plumb, top 21 3/4" above the skid path. Backfill in 6" lifts and tamp.

3 STAGE THE PRIVY

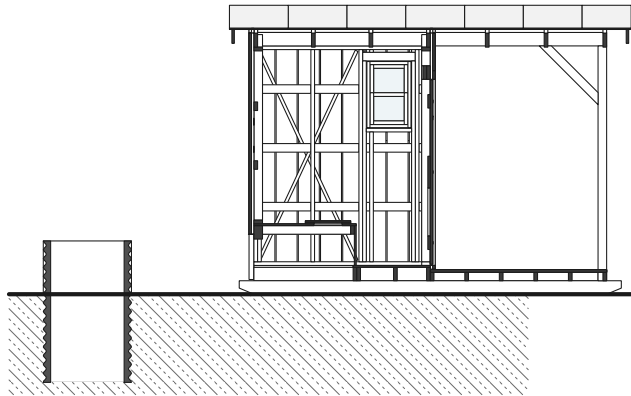


Grade two skid paths level with the pad. Set the privy in line, back wall toward the pipe. Remove the back panel (10 lags) and the flange.

4 SLIDE OVER THE PIPE

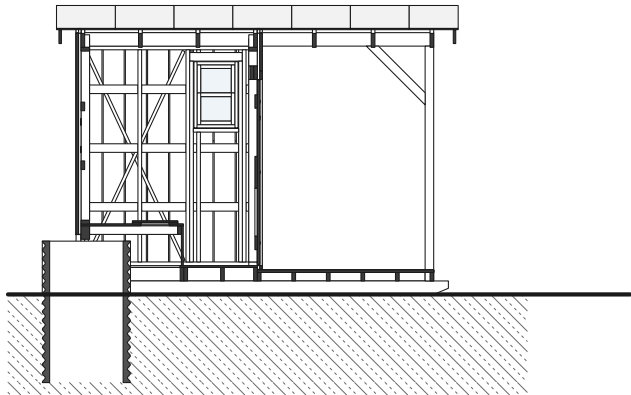


Pull on both skid ends with a bridle. The pipe passes between the skids (2 1/2" each side) and under the bench header (3/4" clear).

5 STOP AT THE MARK

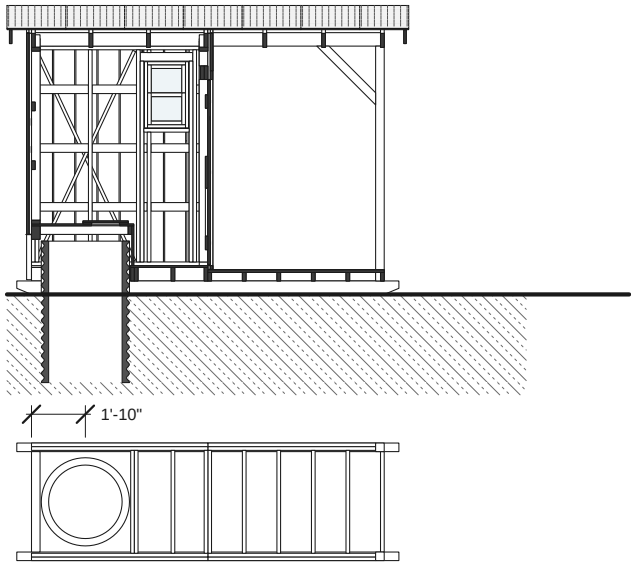

Stop with the pipe center 1'-10" from the outside of the back-wall framing (chalk a mark on each skid). Level the sled with PT shims under the skids.

6 FLANGE, VENT, PANEL

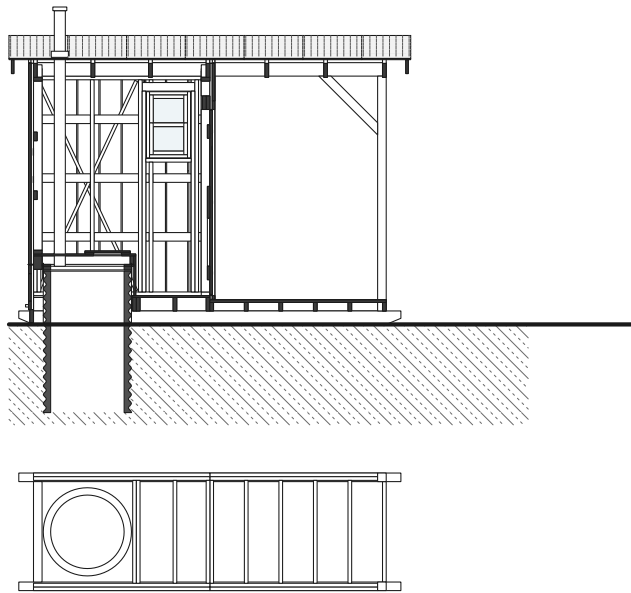

Slide the flange plate + collar in from the back and screw it up to the bench framing; wrap and clamp the EPDM skirt. Fit the vent through the roof boot. Re-install the back panel.

SKID-MOUNTED PIT PRIVY

Relocatable outhouse over a 30" HDPE pit, with covered deck

SITE	Wooded lot, NC Piedmont (loblolly pine / small oak), red clay subsoil
OWNER	—
DESIGN	—

KEY DIMENSIONS

Footprint (framing)	4'-0" x 6'-0"
Deck	4'-0" x 6'-0"
Skids	13'-0" long
Roof	3:12 single slope, metal
Pit	30" ID HDPE, 3'-0" deep
Height to roof	9'-9 15/16"

PARAMETRIC SOURCE

design/privy.json
model hash e554680ace
generated 2026-09-28

REV	DATE	DESCRIPTION
A	2026-09-28	Issued for review


SHEET TITLE

INSTALLATION & RELOCATION SEQUENCE


SCALE: AS NOTED
DATE: 2026-09-28
SHEET 13 OF 17

A-502


RELOCATION: reverse steps 6 to 3. Fill the old pit with at least 2' of clean soil, mound it and mark it. Pull the pipe for reuse or leave it and set a new one.

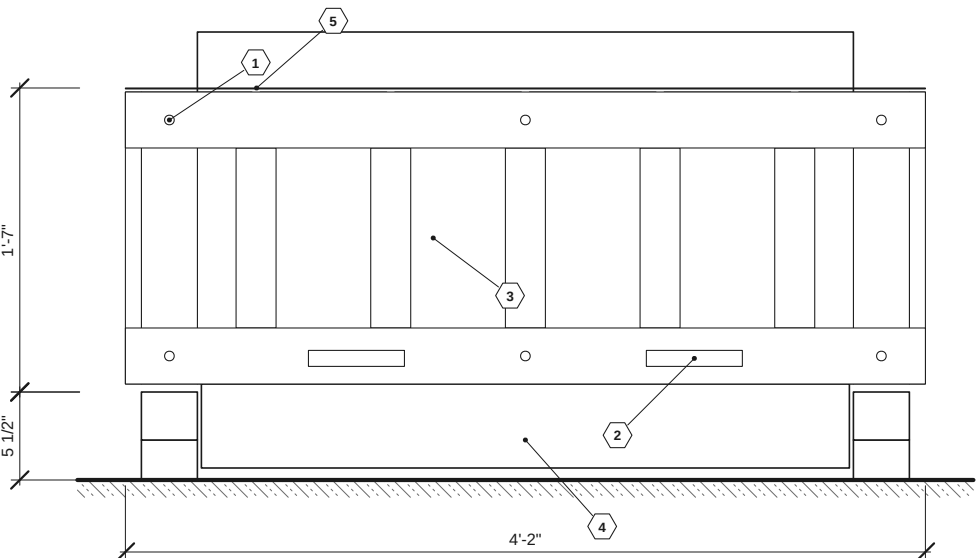

1 REMOVABLE BACK PANEL (FROM OUTSIDE)
SCALE: 1" = 1'-0"

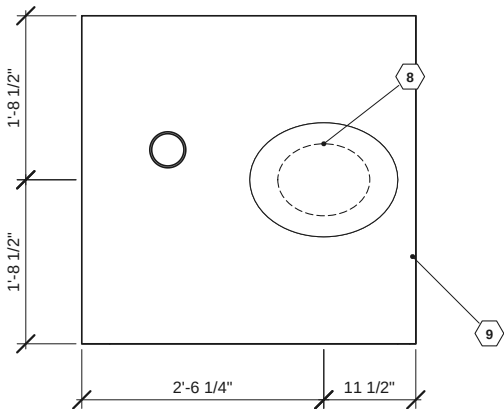

3 BENCH TOP (SEAT LID CLOSED)
SCALE: 1/2" = 1'-0"

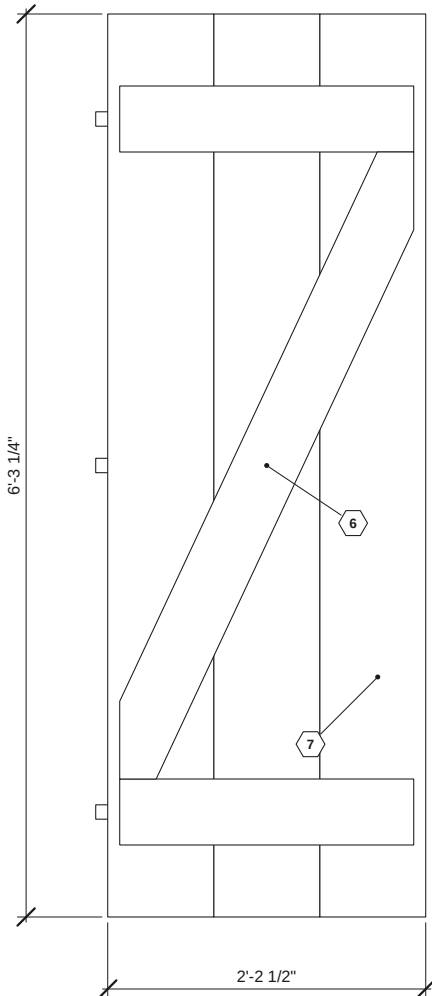

2 DOOR D1 (INSIDE FACE)
SCALE: 3/4" = 1'-0"

KEYNOTES

- 1/4" x 3" galv. lag + fender washer: 3 per rail into corner studs and header, plus 2 into the rims (10 total)
- Galvanized pull handles
- 1x10 rough-sawn boards and 1x3 battens to match the walls
- PT 2x6 kick board between the skids (critter guard, part of the panel); untreated boards stop 6" above grade
- Z-flashing over the panel head
- 1x6 rough-sawn Z-brace, diagonal runs down to the hinge side
- 3 rough-sawn 1x10 boards, 1" screws from inside at every crossing
- Seat hole 11 1/2" x 9", centered 11 1/2" back from the bench front, inside the pipe ID
- Bench front 3/4" plywood panel on 2x4 front rail

SKID-MOUNTED PIT PRIVY

Relocatable outhouse over a 30" HDPE pit, with covered deck

SITE	Wooded lot, NC Piedmont (loblolly pine / small oak), red clay subsoil
OWNER	—
DESIGN	—

KEY DIMENSIONS

Footprint (framing)	4'-0" x 6'-0"
Deck	4'-0" x 6'-0"
Skids	13'-0" long
Roof	3:12 single slope, metal
Pit	30" ID HDPE, 3'-0" deep
Height to roof	9'-9 15/16"

PARAMETRIC SOURCE

design/privy.json
model hash e554680ace
generated 2026-09-28

REV	DATE	DESCRIPTION
A	2026-09-28	Issued for review

SHEET TITLE

DETAILS: REMOVABLE PANEL, DOOR, BENCH

SCALE: AS NOTED

DATE: 2026-09-28

SHEET 14 OF 17

A-503

CUT LIST (1 OF 2)

AREA	STOCK	PIECE	QTY	LENGTH	NOTE
foundation	4x6 PT	Skid	2	13'-0"	6" x 2.5" chamfer both ends; tow hole
floor	2x6 PT	Floor joist	4	3'-6"	
floor	2x6 PT	Rim joist	4	6'-0"	
deck	2x4 PT	Deck joist	5	3'-6"	
deck	2x4 PT	Deck joist	1	3'-5"	
deck	2x4 PT	Deck rim	4	5'-8 1/2"	
deck	4x4 PT	Knee brace	2	2'-10"	45 deg both ends
deck	4x4 PT	Post	1	7'-11 7/8"	bear on skid; galv. post base + (2) 1/2" through-bolts to rim
deck	4x4 PT	Post	1	7'-3/4"	bear on skid; galv. post base + (2) 1/2" through-bolts to rim
deck	5/4x6 PT	Deck board	2	6'-0"	notch at post
deck	5/4x6 PT	Deck board	6	6'-0"	
deck	5/4x6 PT	Deck board	1	6'-0"	rip to width; notch at post
bench	2x4	Bench front rail	1	3'-5"	
bench	2x4	Bench joist	2	3'-0"	
bench	2x4	Bench side ledger	2	3'-0"	
bench	4x6 PT	Bench header	1	3'-5"	hang from doubled corner studs w/ face-mount hangers
wall	2x4	Blocking	3	1'-10 1/2"	
wall	2x4	Blocking	5	1'-9 3/4"	
wall	2x4	Blocking	6	1'-8 1/4"	
wall	2x4	Blocking	3	1'-6 1/8"	
wall	2x4	Blocking	2	1'-3 5/8"	
wall	2x4	Blocking	2	1'-2 3/4"	
wall	2x4	Blocking	3	3 1/8"	
wall	2x4	Blocking	6	2 1/2"	
wall	2x4	Blocking	2	1 3/8"	
wall	2x4	Cripple stud	1	4'-5"	
wall	2x4	Cripple stud	1	7 1/8"	
wall	2x4	Cripple stud	1	1 1/8"	
wall	2x4	Header	2	1'-9 1/2"	
wall	2x4	Jack stud	2	6'-10"	
wall	2x4	Jack stud	2	6'-2 1/2"	
wall	2x4	King stud	1	7'-6 1/4"	
wall	2x4	King stud	2	7'-2 5/8"	
wall	2x4	King stud	1	6'-10 3/8"	
wall	2x4	Rough sill	1	1'-6 1/2"	
wall	2x4	Stud	1	7'-7 1/4"	
wall	2x4	Stud	4	7'-2 5/8"	
wall	2x4	Stud	1	6'-9 3/8"	
wall	2x4	Stud	5	6'-3 1/2"	
wall	2x4	Stud	1	6'-2 1/4"	
wall	2x4	Stud	1	5'-10 1/8"	
wall	2x4	Stud	1	5'-4 3/8"	
wall	2x4	Top plate	2	6'-0"	
wall	2x4	Top plate	2	3'-6 1/4"	3:12 slope
wall	2x4 PT	Bottom plate	2	6'-0"	
wall	2x4 PT	Bottom plate	1	3'-5"	
wall	2x4 PT	Bottom plate	2	7"	
wall	2x6	Header	2	2'-6"	
roof	1x6 rough-sawn	Barge board	2	6'-4 1/4"	
roof	1x6 rough-sawn	Fascia	2	13'-4"	
roof	2x4	Purlin	4	13'-4"	

CUT LIST (2 OF 2)

AREA	STOCK	PIECE	QTY	LENGTH	NOTE
roof	2x6	Frieze block	6	1'-10"	
roof	2x6	Rafter	7	6'-2 1/4"	3:12, birdsmouth both beams, plumb-cut tails
roof	4x6	Beam	2	12'-0"	
siding	1x10 rough-sawn	Siding board	1	8'-6 1/2"	
siding	1x10 rough-sawn	Siding board	7	8'-4 7/8"	
siding	1x10 rough-sawn	Siding board	1	8'-4 1/2"	
siding	1x10 rough-sawn	Siding board	1	7'-8 7/8"	
siding	1x10 rough-sawn	Siding board	1	7'-8"	
siding	1x10 rough-sawn	Siding board	8	7'-4 5/8"	
siding	1x10 rough-sawn	Siding board	1	7'-4 1/4"	
siding	1x10 rough-sawn	Siding board	1	7'-2 1/4"	
siding	1x10 rough-sawn	Siding board	1	7'-1/8"	
siding	1x10 rough-sawn	Siding board	1	6'-10"	
siding	1x10 rough-sawn	Siding board	1	6'-7 7/8"	
siding	1x10 rough-sawn	Siding board	1	6'-5 3/4"	
siding	1x10 rough-sawn	Siding board	3	5'-1 3/4"	
siding	1x10 rough-sawn	Siding board	1	1'-10 1/8"	
siding	1x10 rough-sawn	Siding board	1	1'-8 7/8"	
siding	1x10 rough-sawn	Siding board	1	1'-6 3/4"	
siding	1x10 rough-sawn	Siding board	1	1'-4 5/8"	
siding	1x10 rough-sawn	Siding board	3	11 5/8"	
siding	1x10 rough-sawn	Siding board	4	1 1/2"	
siding	1x3 rough-sawn	Batten	7	8'-4 7/8"	
siding	1x3 rough-sawn	Batten	1	7'-8"	
siding	1x3 rough-sawn	Batten	9	7'-4 5/8"	
siding	1x3 rough-sawn	Batten	1	7'-2 5/8"	
siding	1x3 rough-sawn	Batten	1	7'-1/2"	
siding	1x3 rough-sawn	Batten	1	6'-10 3/8"	
siding	1x3 rough-sawn	Batten	1	6'-8 1/4"	
siding	1x3 rough-sawn	Batten	1	6'-6 1/8"	
siding	1x3 rough-sawn	Batten	5	4'-8 3/4"	
siding	1x3 rough-sawn	Batten	1	1'-7 1/2"	
siding	1x3 rough-sawn	Batten	1	1'-5 3/4"	
siding	1x3 rough-sawn	Batten	1	1'-3 5/8"	
siding	1x3 rough-sawn	Batten	1	1'-1 1/2"	
siding	1x3 rough-sawn	Batten	1	11 3/8"	
siding	1x3 rough-sawn	Batten	5	8 1/8"	
siding	1x3 rough-sawn	Batten	5	1 1/2"	
siding	1x4 rough-sawn	Apron	1	2'-1 1/2"	
siding	1x4 rough-sawn	Head casing	1	2'-10"	
siding	1x4 rough-sawn	Head casing	1	2'-1 1/2"	
siding	1x4 rough-sawn	Side casing	2	6'-4"	
siding	1x4 rough-sawn	Side casing	2	2'-3 1/2"	
siding	1x4 rough-sawn	Sill	1	2'-3"	
removable panel	1x10 rough-sawn	Siding board	10	1'-6 1/4"	
removable panel	1x10 rough-sawn	Batten	5	11 1/4"	
removable panel	1x4 rough-sawn	Panel rail	2	4'-2"	
removable panel	2x6 PT	Kick board	1	3'-4 1/2"	rip to fit; part of the removable panel, closes the gap between the skids
door	1x10 rough-sawn	Door board	3	6'-3 1/4"	
door	1x6 rough-sawn	Z-brace diagonal	1	4'-9 3/4"	
door	1x6 rough-sawn	Z-brace rail	2	2'-1/2"	

LUMBER TO BUY

LUMBER	GRADE / TREAT.	LEN	QTY	BF
1x10 rough-sawn	Southern yellow pine or yellow-poplar, air-dried	8'-0"	22	147
1x10 rough-sawn	Southern yellow pine or yellow-poplar, air-dried	10'-0"	9	75
1x3 rough-sawn	Southern yellow pine or yellow-poplar, air-dried	8'-0"	20	40
1x3 rough-sawn	Southern yellow pine or yellow-poplar, air-dried	10'-0"	7	18
1x4 rough-sawn	Southern yellow pine or yellow-poplar, air-dried	8'-0"	6	16
1x6 rough-sawn	Southern yellow pine or yellow-poplar, air-dried	8'-0"	4	16
1x6 rough-sawn	Southern yellow pine or yellow-poplar, air-dried	14'-0"	2	14
2x4	SPF #2	7'-8 5/8"	32	165
2x4	SPF #2	14'-0"	4	37
2x4 PT	PT UC4A GC	8'-0"	10	53
2x6	SPF #2	8'-0"	10	80
2x6 PT	PT UC4A GC	8'-0"	7	56
4x4 PT	PT UC4B GC	8'-0"	3	32
4x6	DF-L #2	12'-0"	2	48
4x6 PT	PT UC4B GC	8'-0"	1	16
4x6 PT	PT UC4B GC	14'-0"	2	56
5/4x6 PT	PT UCA4	8'-0"	9	45

Total 914 board feet (nominal). Rough-sawn stock is sold by the board foot.

SHEET GOODS

SHEET GOODS / PIECES	QTY
3/4" PT plywood, CDX grade: Floor sheathing 4'-0" x 2'-7 1/2"; Floor sheathing strip 3'-4 1/2" x 3 1/2"; Floor sheathing strip 3'-4 1/2" x 3 1/2"	1
3/4" BC plywood, sealed: Bench top 3'-5 3/4" x 3'-5"; Bench front panel 3'-5" x 1'-4 1/4"	1
3/4" PT plywood: Flange plate 3'-5" x 3'-1 1/2"; Collar ring (from 2 half-rings) 3'-0" x 3'-0"; Collar ring (from 2 half-rings) 3'-0" x 3'-0"	2

PIT, ROOFING & HARDWARE

ITEM	QTY	NOTE
30" dual-wall corrugated HDPE pipe (ADS N-12 or equal), vertical, open bottom	4'-9 3/4"	cut square; top at 21 3/4" above grade
EPDM rubber strip, 45 mil	9'-11 1/8" x 6"	skirt around pipe / collar joint
Stainless worm-gear band clamp, 36"+ (or equal)	2	over skirt, above and below joint
Closed-cell foam sill gasket	9'-5 1/8"	under flange collar
4" Sch 40 PVC (black) vent w/ screened cap	8'-10 5/16"	cut to fit; paint black
Roof pipe boot (EPDM, corrugated-metal type) for 4" pipe	1	
Vent cap / tee with stainless fly screen	1	
29 ga galvanized corrugated steel, 2.67" x 1/2" profile, 26" sheet / 24" coverage	7 @ 6'-7"	~89 sq ft; order cut-to-length
#9 x 1-1/2" roofing screws w/ EPDM washers	100	~0.9 per sq ft
Foam closure strips, inside + outside	27'-4"	low eave and high edge
Metal rake trim / peak flashing	26'-8 11/16"	optional
Z-flashing, galvanized	4'-2"	head of removable panel
Small single-glazed double-hung shed window, wood or vinyl, 18" x 27" unit	1	RO 18 1/2" x 27 1/2"
Door hardware: (3) 8" black strap hinges, thumb latch outside, hook & eye inside	1	
Toilet seat, elongated, with lid	1	mount with stainless hinge bolts through bench top
Face-mount hangers for 4x6 (bench header to corner studs)	2	
Face-mount hangers for 2x4 (bench joists)	4	
Galv. 4x4 post base / standoff	2	fasten to skid
1/2" x 7" HDG carriage bolts w/ nuts & washers	4	posts to deck rim
1/2" x 8" HDG carriage bolts	4	beam to post (or post cap)
Let-in steel wall-bracing strap, 10'	6	
(10) 1/4" x 3" galv. hex lag screws w/ fender washers	1	panel to corner studs, header, rims
3/4" galv. shackle or clevis	4	tow points, both skid ends
8d ring-shank HDG siding nails	600	~2 per board per nailer
10d ring-shank HDG batten nails	300	through the gap, 16" o.c.
16d HDG framing nails / 3" structural screws	10 lb	
Exterior deck screws 2-1/2"	5 lb	decking and trim

SKID-MOUNTED PIT PRIVY

Relocatable outhouse over a 30" HDPE pit, with covered deck

SITE	Wooded lot, NC Piedmont (loblolly pine / small oak), red clay subsoil
OWNER	—
DESIGN	—

KEY DIMENSIONS

Footprint (framing)	4'-0" x 6'-0"
Deck	4'-0" x 6'-0"
Skids	13'-0" long
Roof	3:12 single slope, metal
Pit	30" ID HDPE, 3'-0" deep
Height to roof	9'-9 15/16"

PARAMETRIC SOURCE

design/privy.json

model hash e554680ace

generated 2026-09-28

REV	DATE	DESCRIPTION
A	2026-09-28	Issued for review

SHEET TITLE

CUT LIST & MATERIAL SCHEDULES

SCALE: AS NOTED

DATE: 2026-09-28

SHEET 15 OF 17

A-601

DESIGN CHECKS (COMPUTED FROM THE JSON)

CAT.	CHECK	VALUE	LIMIT	NOTE
Fit	Pipe passes between skids (clear each side)	2 1/2"	>= 1"	OK
Fit	Pipe passes between side-wall framing (each side)	2 1/2"	>= 1"	OK
Fit	Pipe top clears bench header while sliding	3/4"	>= 1/2"	OK
Fit	Pipe clears bench-front floor joist	1/2"	>= 1/4"	OK
Fit	Seat hole lies inside pipe ID (margin)	1"	>= 1/2"	info
Use	Clear floor in front of bench	2'-2 3/4"	>= 24" (IPC min 21")	OKknee room for a seated adult
Fit	Flange collar height (plate to pipe top less gap)	1 1/2"	>= 0	OK
Fit	Door header fits under sloped top plate	1 15/16"	>= 0	OK
Use	Door leaf clear height	6'-3 1/4"	>= 6'-0"	OK
Fit	Window header fits under top plate	1 1/8"	>= 0	OK
Durability	Untreated siding clearance to grade (IRC R317.1)	6"	>= 6"	OKPT skids, rims, plates and panel kick board are exempt
Use	Window sill above floor (privacy)	4'-8"	>= 4'-6"	OK
Use	Deck headroom under low beam	6'-8 1/4"	>= 6'-6"	OK
Use	Headroom at knee-brace foot (low side)	4'-8 1/4"	info	infobraces are at the deck corners
Stock	Deck post length (from 8' stock)	7'-11 7/8"	<= 8'-0"	OK
Stock	Longest stud (92-5/8" precut or 8')	7'-7 3/16"	<= 8'-0"	OK
Stock	Skid length	13'-0"	<= 16'-0"	OK
Framing	Rafter birdsmouth depth	7/8"	<= d/3 = 1 13/16"	OK
Framing	Vent located inside pit ID, clear of rafters/purlins/seat	found	found	OK
Framing	Let-in strap braces, left wall	2	>= 1	OK
Framing	Let-in strap braces, right wall	2	>= 1	OK
Framing	Let-in strap braces, front wall	0	>= 1	infowall too narrow for a 45-62 deg strap; racking taken by bench box, roof diaphragm and back wall
Framing	Let-in strap braces, back wall	2	>= 1	info
Structure	Rafter, snow + dead	fb/Fb' = 0.07; defl 0.004" (L/12688)	<= 1.0; <= L/180	OK2x6 SPF #2, span 3'-8 1/2"
Structure	Purlin (flat) between rafters	fb/Fb' = 0.09; defl 0.009" (L/2552)	<= 1.0; <= L/180	info2x4 SPF #2, span 2'-0"
Structure	Roof beam over deck	fb/Fb' = 0.11; defl 0.012" (L/6026)	<= 1.0; <= L/240	OK4x6 DF-L #2, span 5'-10 1/4"
Structure	Floor joist	fb/Fb' = 0.14; defl 0.006" (L/6791)	<= 1.0; <= L/360	OK2x6 PT SYP #2, span 3'-6"
Structure	Deck joist	fb/Fb' = 0.30; defl 0.024" (L/1750)	<= 1.0; <= L/360	OK2x4 PT SYP #2, span 3'-6"
Structure	Bench front rail, occupant at midspan	fb/Fb' = 0.77; defl 0.057" (L/714)	<= 1.0; <= L/360	OK2x4 SPF #2, span 3'-5"
Structure	Bench joist, occupant at midspan	fb/Fb' = 0.67; defl 0.039" (L/926)	<= 1.0; <= L/360	OK2x4 SPF #2, span 3'-0"
Structure	Bench header (back wall), occupant at midspan	fb/Fb' = 0.17; defl 0.006" (L/6466)	<= 1.0; <= L/360	OK4x6 PT SYP #2, span 3'-5"
Pit	Usable pit volume (to 18" below grade)	55 gal (209 L)	info	infomove the privy when solids reach the freeboard line
Pit	Estimated service life before relocation	7.0 yr	info	info2 persons, 25% of the year, 60 L/person-yr (dry pit, WHO range 40-90)
Structure	Skid soil bearing (dead + live)	463 psf	<= 1500 psf (IBC presumptive)	info
Moving	Estimated shipping weight (empty, no pit parts)	1,588 lb	info	info
Moving	Towing force to drag on dirt (mu 0.5-0.7)	794-1,111 lb	info	infopull from both skid tow holes with a bridle
Loads	Roof snow load pf (ASCE 7: 0.7 Ce Ct Is pg)	12.0 psf	info	infolpg=15 psf, Ce=1.0, Ct=1.2, Is=0.8

Structural rows are simplified NDS allowable-stress screening (No. 2 lumber, CD by load case, Cr 1.15 for repetitive members). Not a sealed design.

KEY PARAMETERS

PARAMETER	VALUE
building.width x depth	4'-0" x 6'-0"
building.low_bearing_height	7'-0"
deck.depth	6'-0"
roof.pitch, overhangs	3:12; eave 12", high 12", rakes 8" / 8"
pit.pipe ID / OD / bury	30" / 36" / 3'-0"
bench.height, hole setback	17", 11 1/2"
foundation.skids	skid on_edge, chamfer 6" x 2 1/2"
walls.stud_spacing	24"
door R.O.	27" x 76"
window unit, sill	18" x 27", 4'-8"

RENDER MATERIALS

	treated_lumber	Pressure-treated southern pine, lightly weathered
	framing_lumber	Kiln-dried SPF / DF framing lumber
	rough_siding	Rough-sawn southern yellow pine or yellow-poplar, ai
	rough_trim	Rough-sawn pine trim
	decking	PT 5/4 deck boards
	treated_plywood	PT plywood
	bench_plywood	BC plywood, two coats exterior polyurethane
	galvanized	Galvanized corrugated steel
	hdpe	Black HDPE corrugated pipe
	vent_pipe	Black PVC
	epdm	EPDM rubber
	steel	Galvanized / black steel hardware
	window_frame	Window frame and sash, white
	glass	glass
	seat	Toilet seat, molded wood / plastic, white
	void	Opening (crescent cut-out)
	soil	Packed brown dirt pad (slight red-clay cast), ~50% c
	forest_floor	Woodland floor: dense pine straw and brown oak leave
	pine_bark	Loblolly pine bark: platy, reddish-brown, dark fissu
	oak_bark	Post / white oak bark: grey, furrowed
	pine_needles	Loblolly pine foliage (needle-cluster blobs; texture
	oak_leaves	Oak foliage (leaf-cluster blobs; texture = per-clust

LIGHTING

Sun azimuth 55 deg, elevation 38 deg; sky sunsky, turbidity 3.0; exposure 0.0 EV; tone map aces. Azimuths are measured in plan from the model +x axis (toward the deck) counter-clockwise toward +y (the high / window side). A view may override lighting (see renders.views[] lighting).

SKID-MOUNTED PIT PRIVY

Relocatable outhouse over a 30" HDPE pit, with covered deck

SITE	Wooded lot, NC Piedmont (loblolly pine / small oak), red clay subsoil
OWNER	—
DESIGN	—

KEY DIMENSIONS

Footprint (framing)	4'-0" x 6'-0"
Deck	4'-0" x 6'-0"
Skids	13'-0" long
Roof	3:12 single slope, metal
Pit	30" ID HDPE, 3'-0" deep
Height to roof	9'-9 15/16"

PARAMETRIC SOURCE

design/privy.json
model hash e554680ace
generated 2026-09-28

REV	DATE	DESCRIPTION
A	2026-09-28	Issued for review

SHEET TITLE

DESIGN CHECKS, PARAMETERS & RENDER SETUP

SCALE: AS NOTED
DATE: 2026-09-28
SHEET 16 OF 17

A-602




1 DECK AND WINDOW SIDE

Path traced with Mitsuba 3 from the same part model as the drawings. Materials, sun, sky, site and cameras come from the JSON (materials / lighting / renders).



2 BACK WITH THE REMOVABLE PANEL OFF: PIPE, FLANGE AND BENCH CAVITY (MORNING SUN)

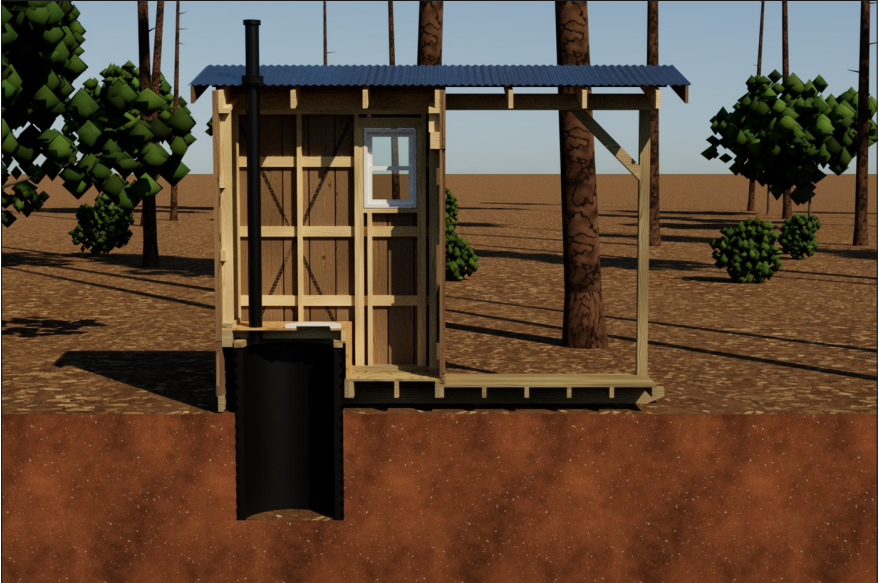

3 CUTAWAY THROUGH THE PIT CENTERLINE

SKID-MOUNTED PIT PRIVY

Relocatable outhouse over a 30" HDPE pit, with covered deck

SITE	Wooded lot, NC Piedmont (loblolly pine / small oak), red clay subsoil
OWNER	—
DESIGN	—

KEY DIMENSIONS

Footprint (framing)	4'-0" x 6'-0"
Deck	4'-0" x 6'-0"
Skids	13'-0" long
Roof	3:12 single slope, metal
Pit	30" ID HDPE, 3'-0" deep
Height to roof	9'-9 15/16"

PARAMETRIC SOURCE

design/privy.json
model hash e554680ace
generated 2026-09-28

REV	DATE	DESCRIPTION
A	2026-09-28	Issued for review

SHEET TITLE

RENDERINGS

SCALE: AS NOTED

DATE: 2026-09-28

SHEET 17 OF 17

R-101